



MIC Mixer Amplifier QSM-20P/QSM-202N

Model No.	QSM-20P
Type	MIC Mixer Amplifier
Power Supply	DC 24V
Alarm	Alarm Tone
Frequency Response	20 Hz ~ 20K Hz $\pm$ 2 dB
Input Sensitivity	AUX 150mV; MIC 3mV (Volume Max.)
Output Sensitivity	output 1V(Balanced)
Total Harmonic Distortion	<0.02%
DC Power Consumption	30mA
Dimension	45(H) x 143(W) x 93mm(D)
Net Weight/Gross Weight	0.5 KGS/1.50 KGS

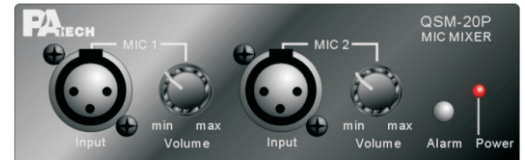


QSM-20P

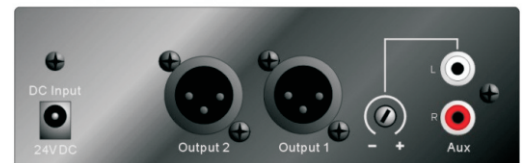

Features:

- ☐ Easy to use.
- ☐ 3 inputs : Mic x 2 + AUX
- ☐ Front input & control
- ☐ Power sources: DC 24V
- ☐ Alarm Tone
- ☐ Output: 2 XLR
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Compact size

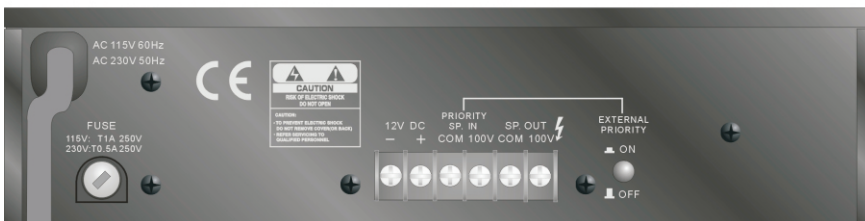

QSM-202N

Model No.	QSM-202N
Type	MIC Mixer Amplifier
Power Supply	AC 115V 60Hz or 230V 50Hz, DC 12V
Power Output	20W RMS
Total Harmonic Distortion	$\leq$ 1 % @ 1 KHz
Sensitivity	1/4" PHONE JACK (UNBALANCE) MIC 1,2 2 mV @ 600 Ω AUX 1,2 100mV @ 10K Ω
Frequency Response	20 Hz ~ 20K Hz $\pm$ 3dB
Output	100V
Signal to Noise Ratio	86 dB
Voice Priority Mute	Speaker In
Phantom Power	MIC 1, MIC 2. (Adjustable)
AC Power Consumption	40W @ RATED POWER
Dimension	60(H) x 240(W) x 150mm (D)
Net Weight/Gross Weight	1.5 KGS/2kgs
Mounting	Free standing or Hang-bracket

Features:

- ☐ Easy to use.
- ☐ 3 inputs : Mic x 2, AUX x 2
- ☐ Front input & control
- ☐ 2 power sources: DC 12V and AC 230V 50 Hz or 115V 60Hz
- ☐ Over temperature, over load, and speaker short protection.
- ☐ MIC1, MIC2, and AUX1,2 volume control
- ☐ Speaker output : 100V
- ☐ Speaker input : 100V