


Public Address System

Mixer Pre-Amplifier

QSM-60V

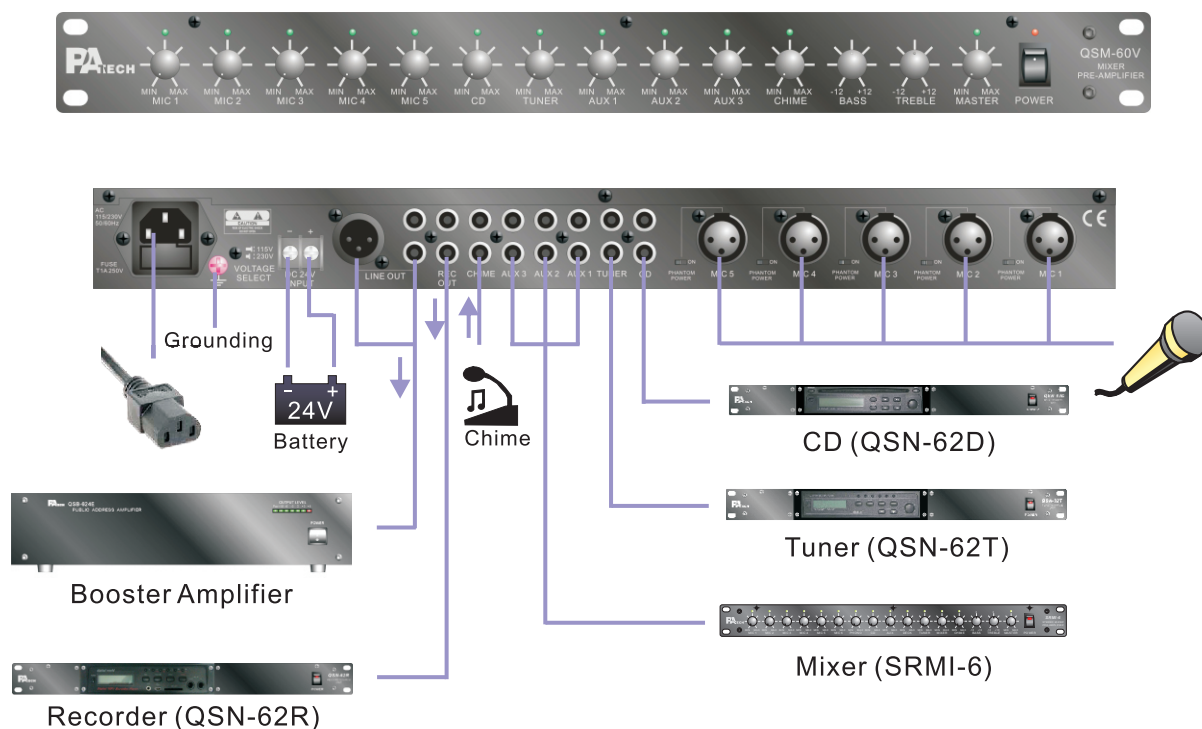

Model	QSM-60V
Type	Pre-Mixer Amplifier
Power Source	AC 115V/230V 50/60 Hz, DC 24V
Frequency Response	20Hz ~ 20KHz
Total Harmonic Distortion	≤ 1% @ 1KHz
Input Sensitivity	MIC 1 ~5: 1mV @600Ω, Balanced (with Phantom power switch) AUX 1 ~3: 150mV @10KΩ, Unbalanced CD: 150mV @10KΩ, Unbalanced Tuner: 150mV @10KΩ, Unbalanced Chime: 1 V @10KΩ, Unbalanced
Output Sensitivity	Line Out: 1V @100Ω, Balanced Record Out: 1V @100Ω, Unbalanced
Mute Priority	Chime, MIC 1, MIC 2.
Tone Control	Bass 100Hz ± 10 dB Treble 10KHz ± 10 dB
Power Consumption	AC 9.5W @ Rated Power DC 1A @ Rated Power
Dimension	44(H) x 483(W) x 185(D) mm
Weight	4 kgs
Mounting	19" rack

Features:

- ☐ 11 channel inputs: MIC x 5, AUX x 3, CD, Tuner, and Chime.
- ☐ Phantom Power Switch
- ☐ Up to 3 mute priorities: Chime, MIC 1, MIC 2.
- ☐ 2 power sources: DC 24V and AC 230/115V 50/60Hz .
- ☐ 2-color LED indicator for each input signal. Green is normal input, red is clipping.
- ☐ Master volume, Bass, and Treble control for the output.
- ☐ Record output
- ☐ Standard 19" rack model
- ☐ 1U height