


Distribution Mixer Amplifier QSM-6505A/6510A

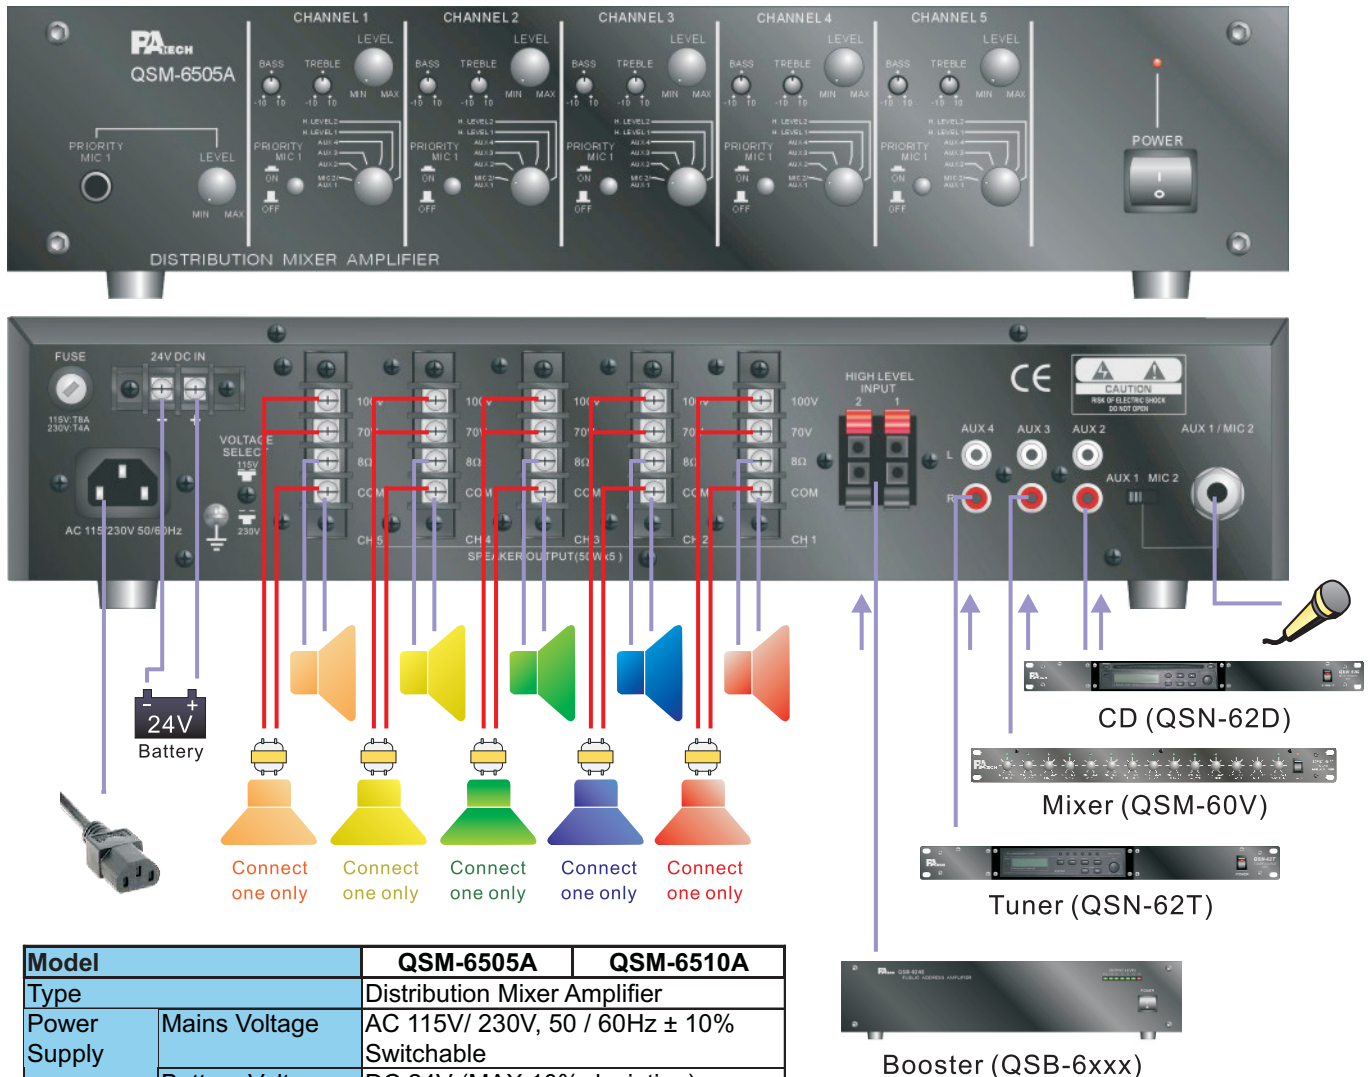

Model	QSM-6505A	QSM-6510A
Type	Distribution Mixer Amplifier	
Power Supply	Mains Voltage	AC 115V/ 230V, 50 / 60Hz $\pm$ 10%
	Battery Voltage	DC 24V (MAX 10% deviation)
Output Power:	50W x 5	100W x 5
Total Harmonic Distortion	$\leq$ 1% @ 1KHz, rated power	
Sensitivity	1/4" PHONE JACK (UNBALANCED)	
	MIC 1~2 1 mV @ 600 Ω	
	AUX 1 200mV @ 20K Ω	
	RCA JACK (UNBALANCED)	
	AUX 2 200mV @ 20K Ω	
	AUX 3 200mV @ 20K Ω	
Frequency Response	50Hz ~ 15KHz $\pm$ 3dB	
	SPEAKER JACK (UNBALANCED)	
Output	100V, 70V, 8 Ω (screw terminal)	
Signal to noise ratio	>70dB	
Voice Priority Mute	MIC. 1 (Selectable)	
Protection	Speaker Short	
	Temperature Overload	
AC power consumption	640W	1280W
DC power consumption	15A	30A
Dimensions (H x W x D) mm	88 x 425 x 345	88 x 425 x 385
Weight	15 kgs	20 kgs
Mounting	Free standing or 19" rack	

Features:

- ☐ 5 Zone outputs
- ☐ 7 inputs: 2 Mic + 3 AUX + 2 High level.
- ☐ Front Mic & control
- ☐ Individual zone control
- ☐ MIC 1 priority selection switch
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Speaker output : 8 Ω , 70V and 100V output
- ☐ Standard 19" rack model
- ☐ 2U height