


Mixer Amplifier - QSM-215/QSM-230



QSM-230

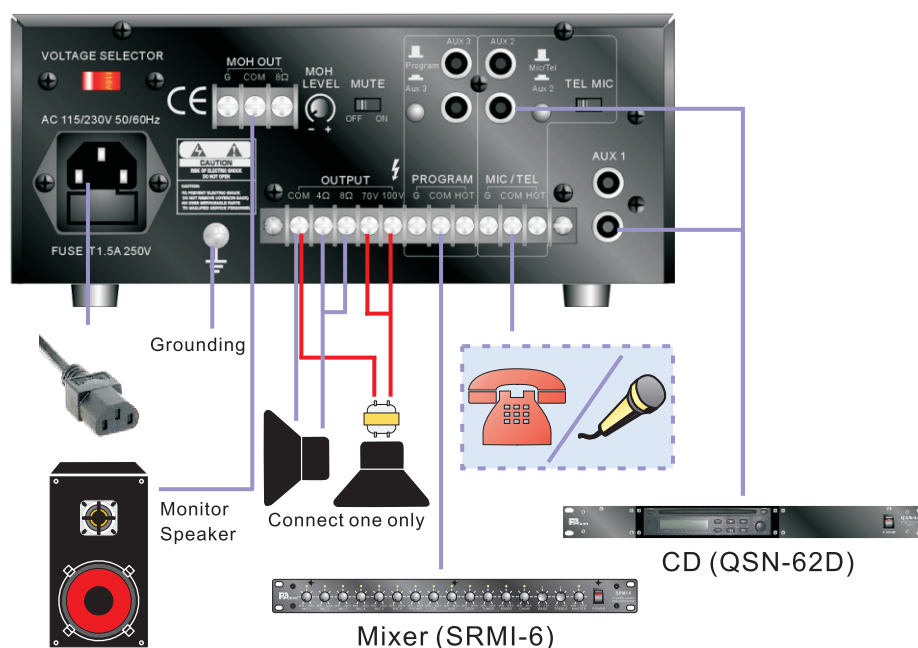

Model	QSM-215	QSM-230
Power Output	15W RMS	30W RMS
Power Supply	AC 115/230V 50/60Hz	
Total Harmonic Distortion	<= 1 % @ 1 KHz	
Sensitivity	TERMINAL (BALANCED)	
	MIC 1 mV @ 600Ω	
	TELEPHONE 100mV@10KΩ	
	PROGRAM 100mV@10KΩ	
	RCA JACK (UNBALANCED)	
Frequency Response	50 Hz ~ 20K Hz ±3dB	
	100 V, 70 V, 8Ω, 4Ω	
Output	MOH, 1W @ 8Ω	
Signal to Noise Ratio	80 dB	
Voice Priority Mute	MIC / Telephone / AUX 2	
Tone	BASS 100Hz ± 10dB	
	TREBLE 10KHz ± 10dB	
AC Power Consumption	50W	90W
Indicator	Output Level	
Dimension	88(H) x 212(W) x 275mm(D)	
Weight	3.3 KGS	4 KGS
Mounting	FREE STANDING OR 19" RACK	

Features:

- ☐ Economical model
- ☐ Multi- input
- ☐ 3 front input level control
- ☐ 2 selection switches
TEL/AUX, AUX/Program
- ☐ Mute Selection Switch
- ☐ Mute Priority:
MIC / TEL / AUX2
- ☐ Over temperature, over
load, and speaker short
protection.
- ☐ Master Bass, and Treble
control
- ☐ MOH outputs
- ☐ Speaker output :4 Ω, 8 Ω,
70V and 100V output
- ☐ 2U height