


Mixer Amplifier

QSM-606AZ/QSM-612AZ/QSM-624AZ
QSM-636AZ/QSM-648AZ

Option:
+Chime

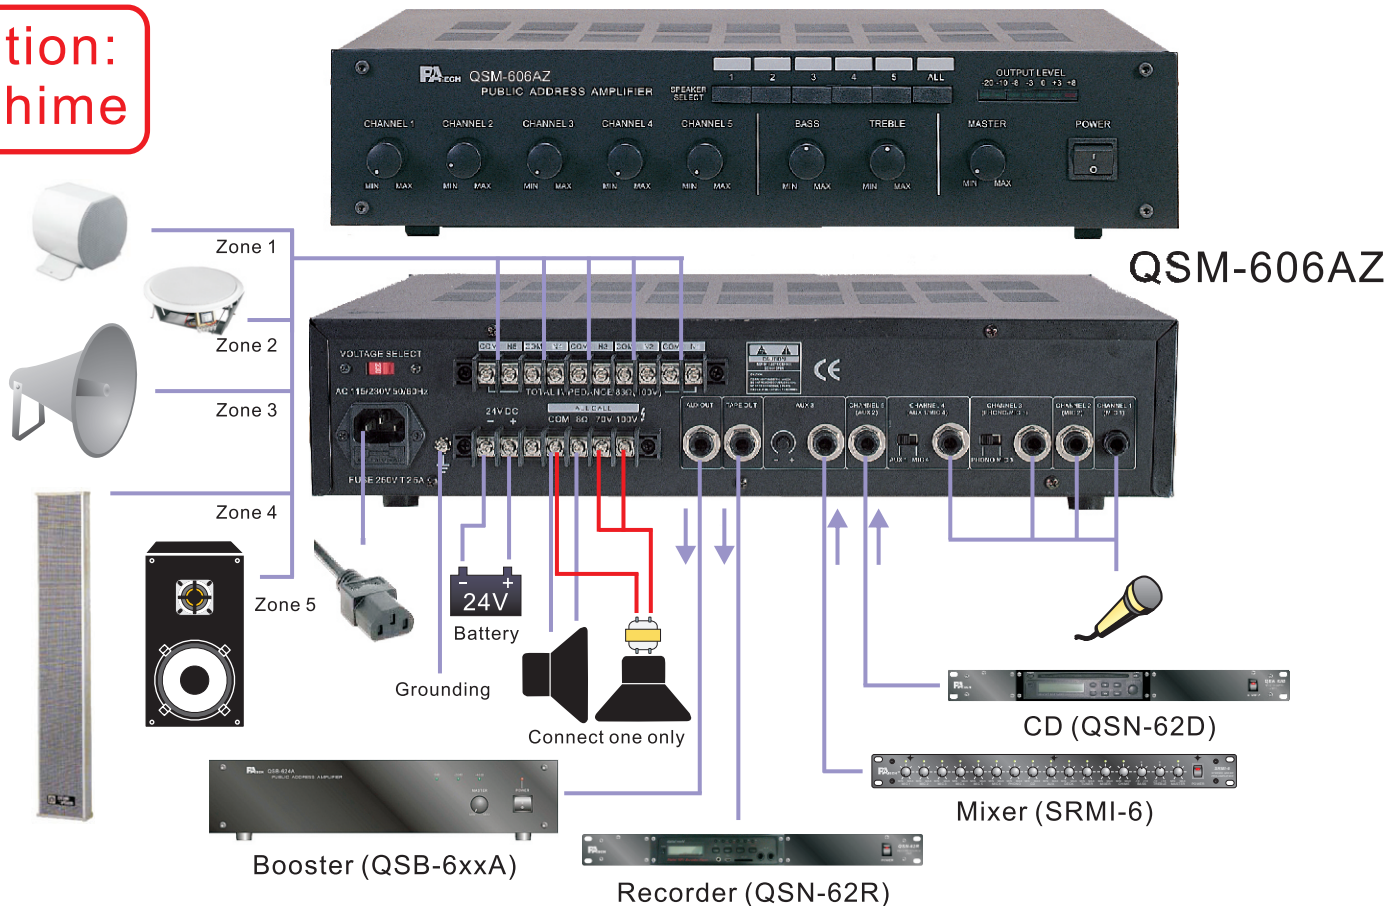

Model	QSM-606AZ	QSM-612AZ	QSM-624AZ	QSM-636AZ	QSM-648AZ
Power Output (RMS)	60W	120W	240W	360W	480W
Power Supply	AC 115/230V 50/60Hz, DC 24V				
Total Harmonic Distortion	<=1% @ 1 KHz				
Sensitivity	1/4" Phone Jack (Unbalance) Channel 1~3(MIC 1~3) 1mV @600 Ω Phono 2mV@50KΩ Channel 4(MIC 4) 1mV @600Ω Aux 1 100mV@220KΩ Channel 5(Aux 2), Aux 3 100mV@10kΩ Tape out, Aux out 1V				
Frequency Response	50 Hz ~ 15K Hz ±3dB				
Mute Priority	MIC. 1; Mic2 is not affected.				
Output	100V, 70V, 8 Ω				
Signal to Noise Ratio	86 dB				
Tone	Bass 100 Hz ±10 dB; Treble 10KHz ±10 dB				
AC Power Consumption	160W	320 W	640W	960W	1280W
DC Power Consumption	4A	8A	16A	24A	30A
Dimension	88(H) x 425(W) x 305mm (D)			132(H) x 425(W) x 355mm (D)	
Weight	8 kgs	8.5 kgs	10.5 kgs	15 kgs	17 kgs
Mounting	FREE STANDING OR 19" RACK				

Features:

- ☐ Standard 19" rack model
- ☐ 6-channel inputs
- ☐ 5 front input level control
- ☐ 2 selection switches MIC/Phono, MIC/AUX
- ☐ 2 power sources: DC 24V and AC 230/115V 50/60Hz
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Master volume, Bass, and Treble control
- ☐ 5-Zone outputs
- ☐ Speaker output : 8 Ω, 70V and 100V output
- ☐ AUX + Tape output
- ☐ 2U, 3U height