


Public Address System

Dual Mixer Amplifier - MDA-963/MDA-9126



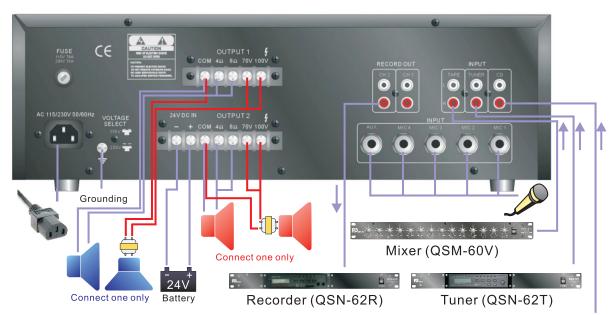

| Model No. | MDA -963 | MDA -9126 |
|--------------------------------------|---|---------------------|
| Туре | Dual Mixer Amplifier | |
| Power Supply | AC 115/230V 50/60Hz, DC 24V | |
| Power Output (RMS) | CH1:60W + CH2:30W | CH1:120W +CH2:60W |
| Total Harmonic Distortion <=1%@1 KHz | | |
| Sensitivity | 1/4" Phone Jack (Unbalanced) | |
| | Mic 1~4 1.5mV@600 Ω | |
| | Aux 200mV@10KΩ | |
| | RCA Jack (Unbalanced) | |
| | CD,TUNER,TAPE 200mV@10K Ω | |
| | Record Out 1V | |
| Frequency Response | 50 Hz~ 15KHz ± 3dB | |
| Mute Priority | Mic 1. | |
| Output | 100V, 70V, 8 Ω, 4 Ω | |
| Signal to Noise Ratio | 86dB | |
| Tone | Bass 100 Hz ±10 dB; Treble 10KHz ±10 dB | |
| AC Power Consumption | 240 W @ Rated Power | 480 W @ Rated Power |
| DC Power Consumption | 10A @ Rated Power | 20A @ Rated Power |
| Dimension | 132(H) x 425(W) x 355mm (D) | |
| Weight (Net/Gross) | 13 KGS | 16 KGS |
| Mounting | Free Standing or 19" Rack | |



Features:

2 channels
6 inputs: MIC x 4, AUX, CD/Tunner/Tape.
Front input level control
Front input selection switch CD/Tunner/Tape
Over temperature, over load, and speaker short protection.
2 Master volume, Bass, and Treble control
Record output
Speaker output: 4 Ω, 8 Ω, 70V and 100V(2 sets)
3U height

Standard 19" rack model