


Mixer Amplifier QSM-503/QSM-506/QSM-512

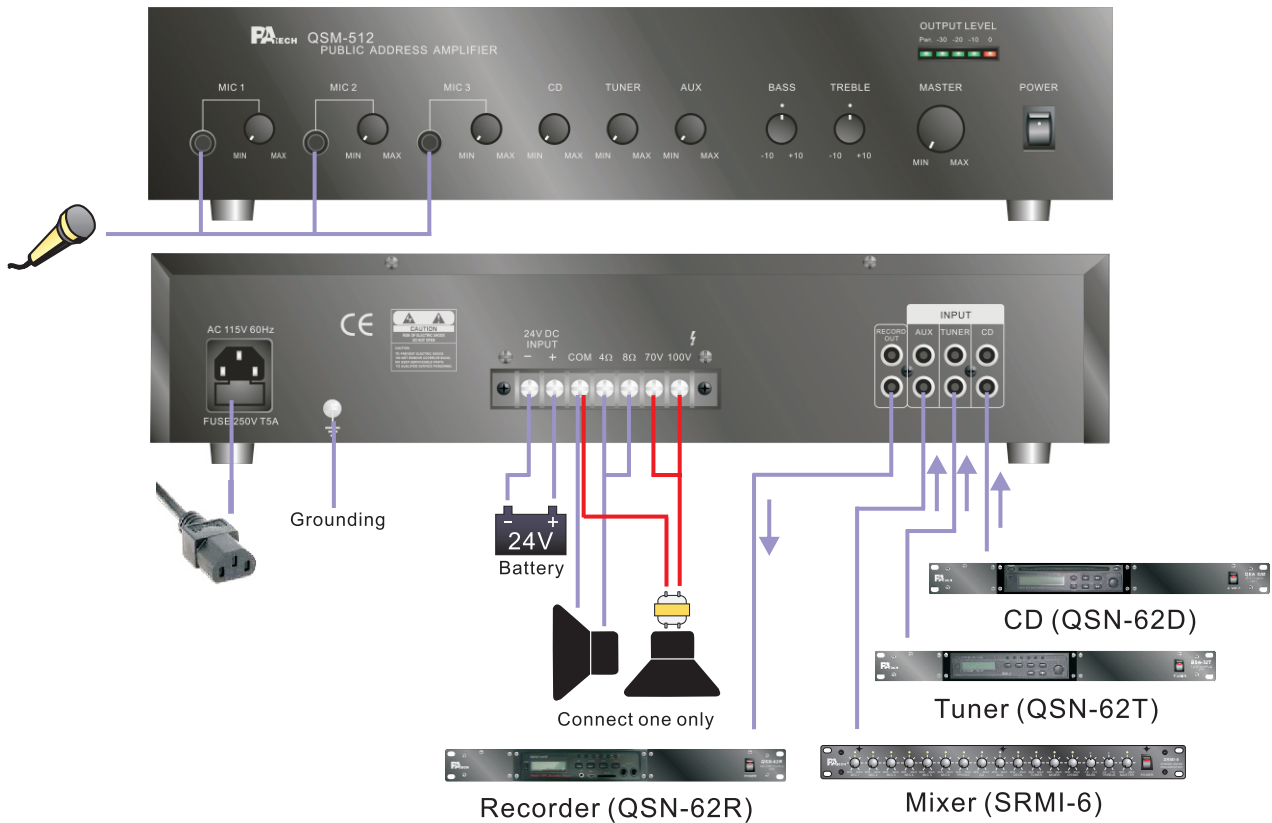

Type		Mixer Amplifier		
Model		QSM-503	QSM-506	QSM-512
Output Power:		30W	60W	120W
Supply	Main Voltage	AC 115V or 230V 50/60Hz		
	Battery Voltage	DC 24V		
Outputs		4Ω, 8Ω, 70V, 100V		
Record Output		1V@100 Ω		
Frequency Response		50Hz ~ 15KHz ± 3dB		
Inputs Impedance		MIC 1~3: 600Ω unbalanced. CD/Aux/Tuner: 10KΩ unbalanced		
Input Sensitivity		Mic 1~3: 1.5mV CD/Aux/Tuner: 200mV		
Mute Priority		MIC 1		
Tone Controls		Bass : 100Hz ± 10dB Treble : 10KHz ± 10dB		
Total Harmonic Distortion		< 0.1% @ 1KHz, rated power		
Signal to Noise Ratio		> 80dB		
AC Power Consumption		80W	160W	320W
DC Power Consumption		2.5A	5A	10A
Dimension		88 (H) x 425 (W) x 275 (D) mm		
Weight		6 Kgs	8 Kgs	10 Kgs
Mounting options		Table top or 19" rack mountable		

Features:

- ☐ Economical model
- ☐ 6 inputs : Mic x 3 + CD + AUX + Tuner.
- ☐ Front MIC input
- ☐ 2 power sources: DC 24V and AC 230/115V 50/60Hz
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Individual input control
- ☐ Master volume, Bass, and Treble control
- ☐ Speaker output : 4 Ω, 8 Ω, 70V and 100V output
- ☐ Record output
- ☐ Standard 19" rack model
- ☐ 2U height