


Mixer Amplifier QSM-503X8/QSM-506X8/QSM-512X8

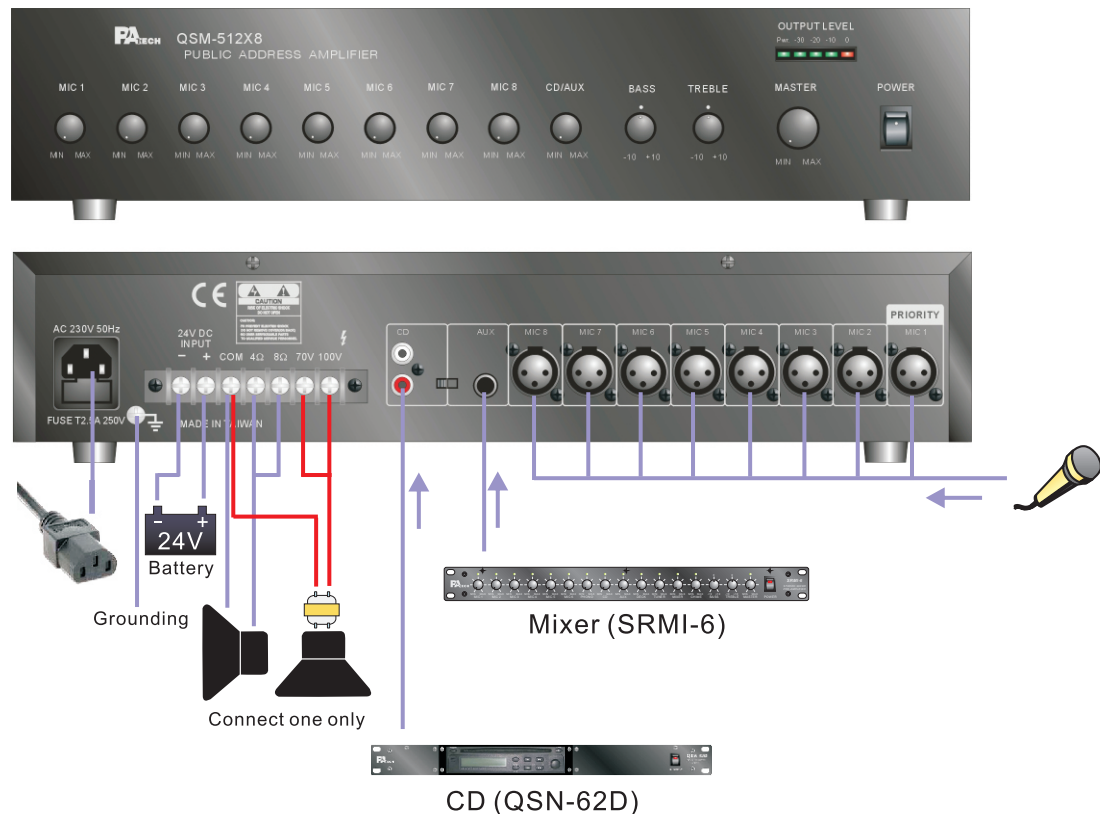

Model	QSM-503X8	QSM-506X8	QSM-512X8
Output Power:	30W	60W	120W
Supply	Main Voltage AC 115V or 230V 50/60Hz		
	Battery Voltage DC 24V		
Outputs	4Ω, 8Ω, 70V, 100V		
Frequency Response	50Hz ~ 15KHz ± 3dB		
Inputs Impedance	MIC 1~8: 600Ω balanced. CD/Aux: 10KΩ unbalanced		
Input Sensitivity	Mic 1~8: 1.5mV CD/Aux: 200mV		
Mute Priority	MIC 1		
Tone Controls	Bass : 100Hz ± 10dB Treble : 10KHz ± 10dB		
Total Harmonic Distortion	< 0.1% @ 1KHz, rated power		
Signal to Noise Ratio	> 80dB		
AC Power Consumption	80W	160W	320W
DC Power Consumption	2.5A	5A	10A
Dimension	88 (H) x 425 (W) x 275 (D) mm		
Weight	6 Kgs	8 Kgs	10 Kgs
Mounting options	Table top or 19" rack mountable		

Features:

- ☐ Economical model
- ☐ 9 inputs : Mic x 8 + CD / AUX .
- ☐ 2 power sources: DC 24V and AC 230/115V 50/60Hz
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Individual input control
- ☐ Master volume, Bass, and Treble control
- ☐ Speaker output : 4 Ω, 8 Ω, 70V and 100V output
- ☐ Standard 19" rack model
- ☐ 2U height