


Public Address System

Stereo Mixer Amplifier - QSM-820P

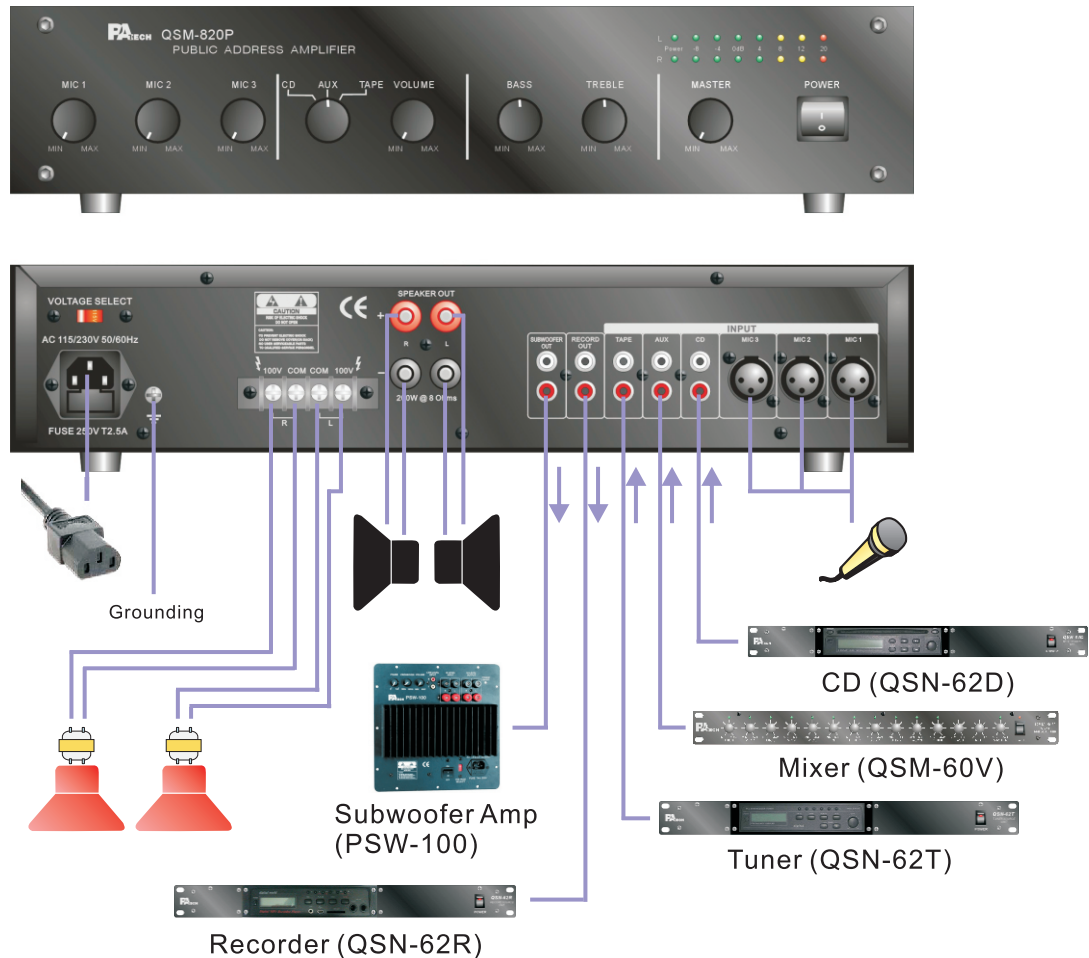

Model	QSM-820P
Power Output	100W x 2 RMS
Power Supply	AC 115/230V 50/60Hz
Total Harmonic Distortion	$\leq 0.05\% @ 1 \text{ KHz}$
Sensitivity	1/4" PHONE JACK (UNBALANCED) MIC 1~3 1 mV @ 600 Ω (XLR, BALANCE) CD, AUX, TAPE 200 mV @ 20K Ω RECORD OUT @ 1V
Frequency Response	20Hz ~ 20KHz $\pm 3\text{dB}$
OUTPUT	8 Ω Binding Post, Screw terminal 100V x 2
Signal to Noise Ratio	>70 dB
Damping Factor	>200
Voice Priority Mute	MIC 1
Tone	Bass 100Hz $\pm 10\text{dB}$, Treble 10KHz $\pm 10\text{dB}$
PROTECTION	SPEAKER SHORT TEMPERATURE OVERLOAD
AC Power Consumption	500W@Rated Power
Dimension	88(H) x 425(W) x 305mm(D)
Weight	10.5 KGS
Mounting	FREE STANDING OR 19" RACK

Features:

- ☐ Standard 19" rack model
- ☐ 2 channels (Stereo)
- ☐ 6 inputs : Mic x 3, CD, AUX, Tape.
- ☐ Front input level control
- ☐ Front input selection switch CD/AUX/Tape
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Speaker output : 8 Ω and 100V output
- ☐ Subwoofer output
- ☐ Record output
- ☐ Master volume, Bass, and Treble control
- ☐ 2U height