


Mixer Amplifier - QSM-303

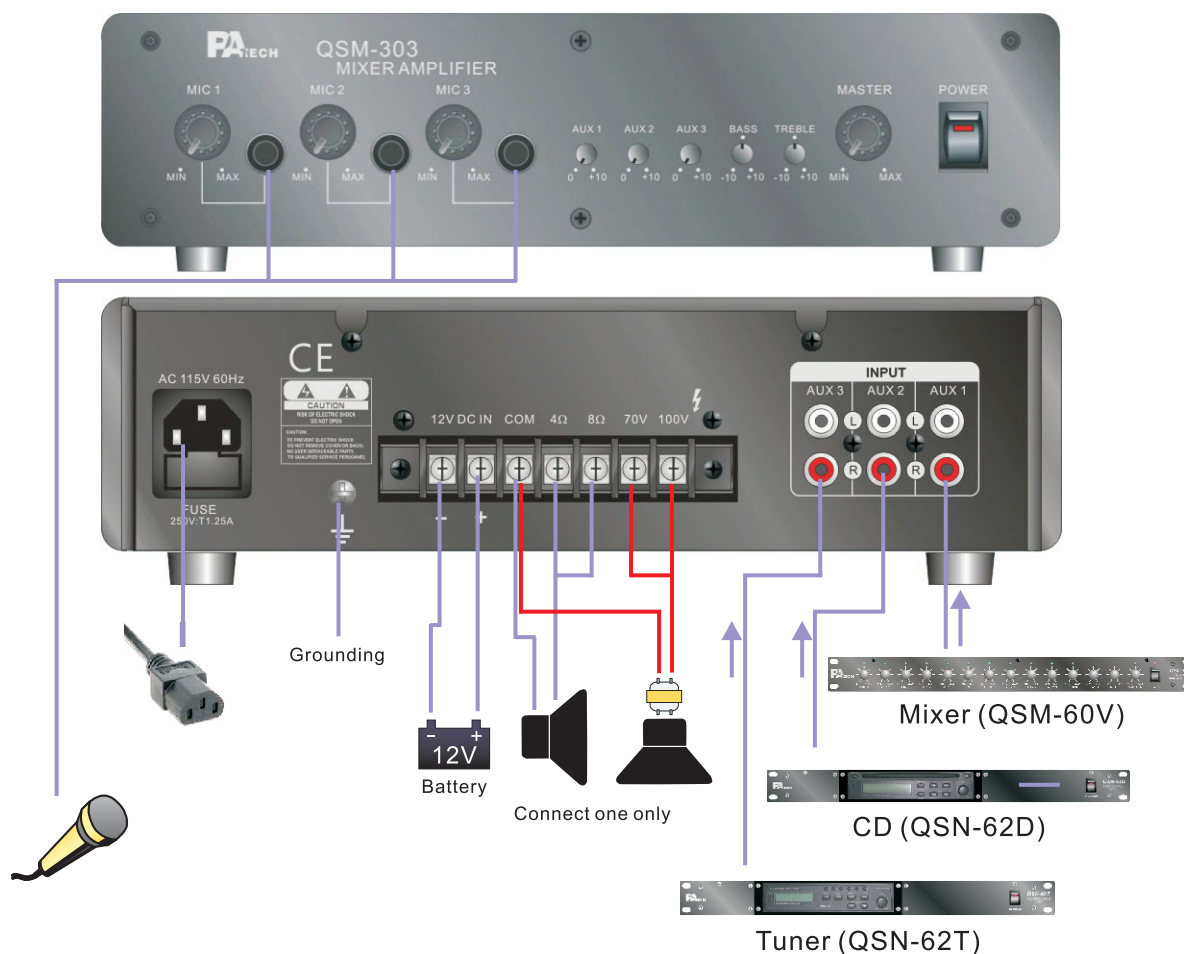

Model	QSM-303
Power Supply	AC 115 or 230V 50/60Hz, DC 12V
Power Output	30W RMS
Total Harmonic Distortion	<=1% @ 1 KHz
Sensitivity	1/4" Phone Jack (Unbalance) MIC 1~3, 1.5mV @ 600 Ω RCA Jack (Unbalance) AUX 1~3, 200mV @ 10K Ω
Mute Priority	MIC 1
Output	100V, 70V, 8 Ω, 4 Ω
Signal to Noise Ratio	73 dB (full volume) 70 dB (AUX 1, 2) 65 dB (MIC 1, 2)
Frequency Response	50Hz ~ 15K Hz ±3 dB
Tone	Bass 100 Hz ±10 dB Treble 10KHz ±10 dB
AC Power Consumption	80 W @ RATED POWER
DC Power Consumption	4A @ RATED POWER
Dimension	68(H) x 275(W) x 225(D) mm
Weight	4 KGS
Mounting	FREE STANDING or Hang-bracket

Features:

- ☐ Compact size
- ☐ Easy to Use.
- ☐ 6 inputs : AUX x 3, MIC x 3
- ☐ Front MIC input & control
- ☐ 2 power sources: DC 12V and AC 230V 50Hz or 115V 60Hz
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Individual input control
- ☐ Master volume, Bass, and Treble control
- ☐ Speaker output : 4 Ω, 8 Ω, 70V and 100V output