



Booster Amplifier

QSB-612A/QSB-624A/QSB-636A/QSB-648A



QSB-624A

QSB-648A

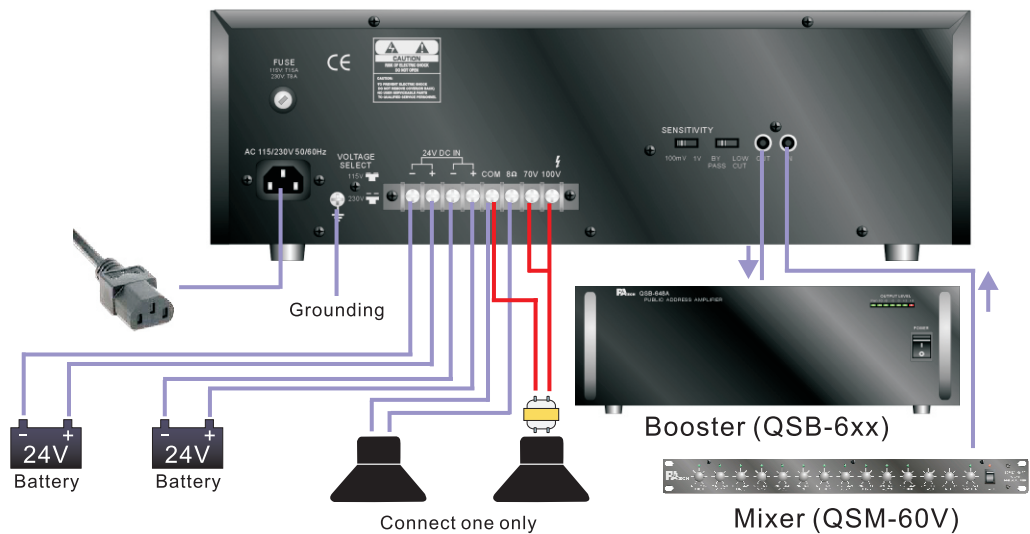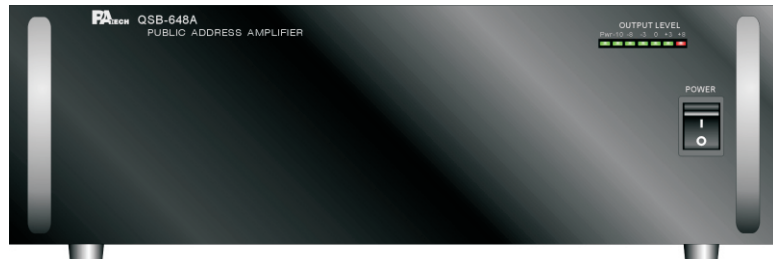

Model	QSB-612A	QSB-624A	QSB-636A	QSB-648A
Power Output (RMS)	120W	240W	360W	480W
Power Supply	AC 115/230V 50/60Hz, DC 24V			
Total Harmonic Distortion	≤ 1 % @ 1 KHz			
Sensitivity	1V, 100mV@ 10K Ω (Unbalanced)			
Output	100 V, 70 V, 8 Ω			
Signal to Noise Ratio	86 dB			
AC Power Consumption	320W	640W	960W	1280W
DC Power Consumption	8A	15A	24A	30A
Dimension (H x W x D)	88 x 425 x 305 mm		132 x 425 x 355 mm	
Height	2U		3U	
Weight	8.2 KGS	10.6 KGS	15 KGS	17 KGS
Mounting	FREE STANDING OR 19" RACK			

Features:

- ☐ Easy to Use.
- ☐ One RCA Jack Input
- ☐ One RAC Jack Output
- ☐ 2 power sources: DC 24V and AC 230/115V 50/60Hz
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Sensitivity selection Switch
- ☐ Speaker output : 8 Ω, 70V and 100V.
- ☐ Standard 19" rack model.