


Public Address System

Mixer Amplifier - QSM-306V

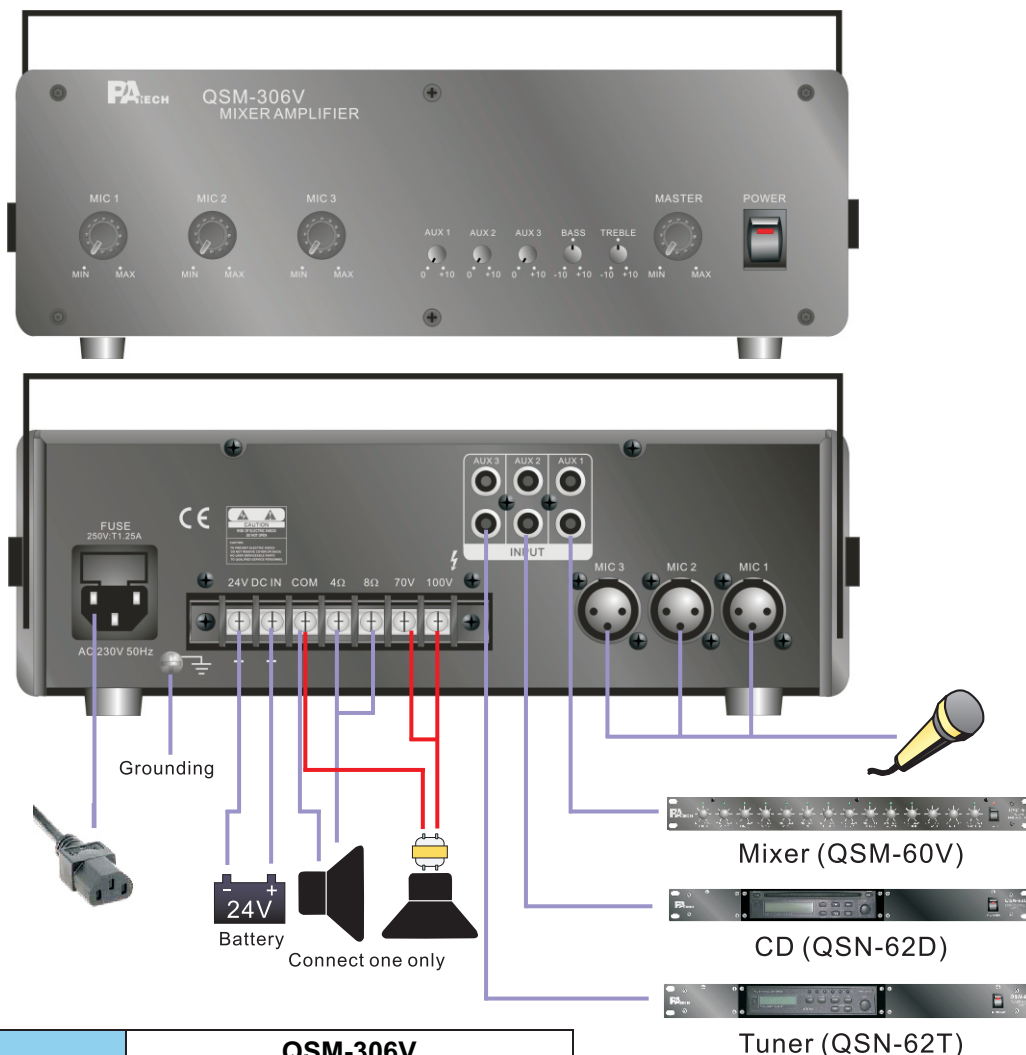

Model No:	QSM-306V
Power Supply	AC 115 or 230V 50/60Hz, DC 24V
Power Output	60W RMS
Total Harmonic Distortion	$\leq 10\%$ @ 1 KHz
Sensitivity	MIC 1 ~3 XLR (Balanced) 1.5mV @ 600 Ω RCA Jack (Unbalanced) AUX 1~3 , 200mV @ 10K Ω
Mute Priority	MIC 1
Output	100V, 70V, 8 Ω , 4 Ω
Signal to Noise Ratio	80dB
Frequency Response	50 Hz ~ 15K Hz ± 3 dB
Tone	Bass 100 Hz ± 10 dB Treble 10KHz ± 10 dB
AC Power Consumption	160 W @ RATED POWER
DC Power Consumption	8A @ RATED POWER
Dimension	88(H) x 275(W) x 225mm (D)
Weight	6 KGS
Mounting	Free standing or Hang-Bracket

Features:

- ☐ Compact size
- ☐ Easy to Use.
- ☐ 6 inputs : AUX x 3, MIC x 3
- ☐ Front input level control
- ☐ 2 power sources: DC 24V and AC 230V 50Hz or 115V 60Hz
- ☐ Priority: Mic 1
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Master volume, Bass, and Treble control
- ☐ Speaker output : 4 Ω , 8 Ω , 70V and 100V