


Audio Mixer SRMI-6

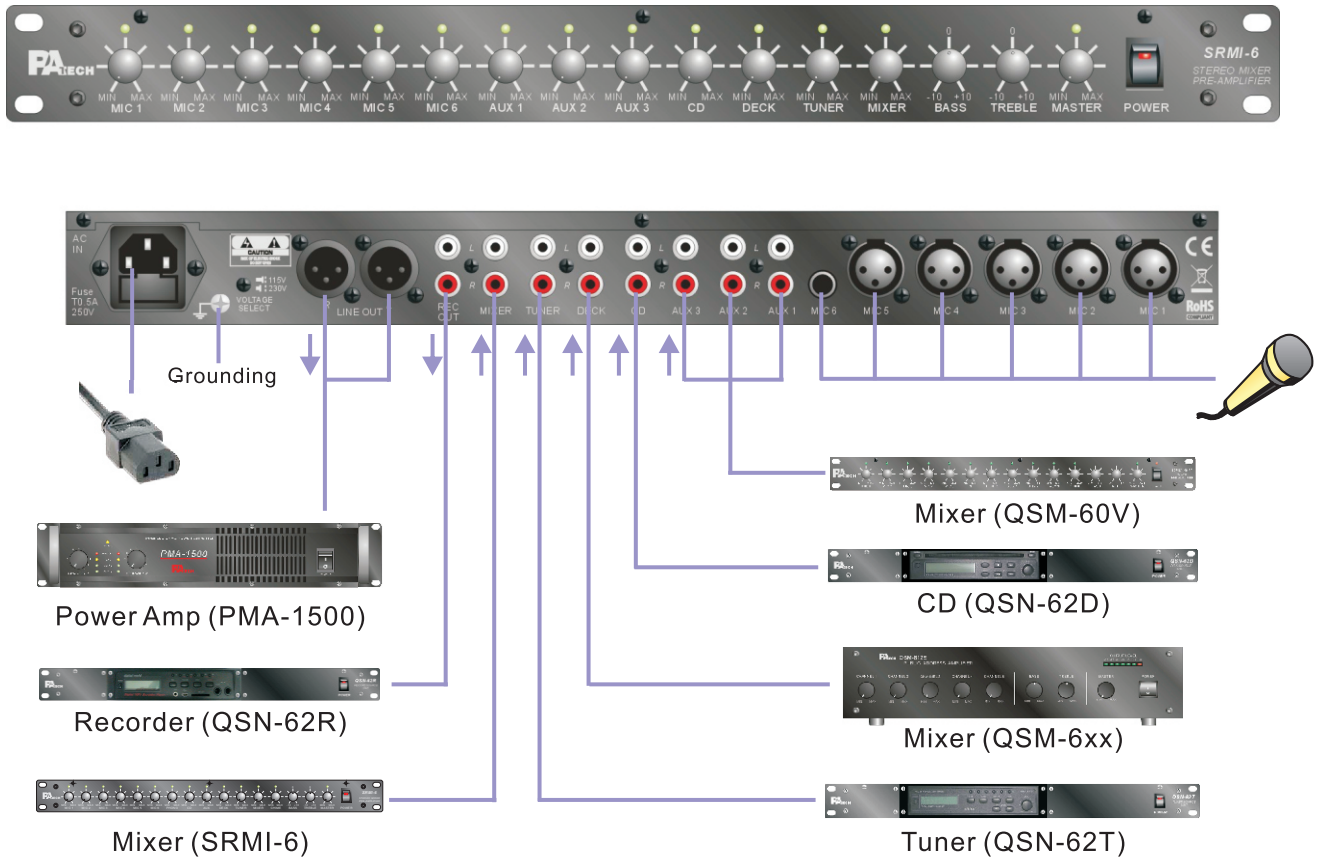

Model No	SRMI-6
Power Supply	AC 115/230V 50/60Hz
Total Harmonic Distortion	<=1%@1 KHz
Sensitivity	MIC 1 ~ 5 XLR (Jack) MIC 6 1/4" Phone Jack 1.5mV@600Ω AUX x 3, CD, Deck, Tuner, Mixer. RCA Jack (Unbalanced) 200mV@10KΩ
Output	1V
Signal to Noise Ratio	86dB
Tone	Bass 100 Hz ±10 dB Treble 10KHz ±10 dB
AC Power Consumption	10 W @ RATED POWER
Dimension	44(H) x 482(W) x 185mm (D)
Weight	4 KGS
Mounting	19" Rack

Features:

- ☐ 13 input channels: Mic x 6, AUX x 3, CD, Deck, Tuner, Mixer
- ☐ 2-color LED indicator for each input signal. Green is normal input, red is clipping.
- ☐ Front individual input level control
- ☐ Master volume, Bass, and Treble control for the output.
- ☐ Record output
- ☐ Stereo line-out
- ☐ Standard 19" rack model
- ☐ 1U height