

Public Address System



Booster Amplifier

QSB-612EI/QSB-624EI/QSB-636EI/QSB-648EI



QSB-624EI

QSB-648EI

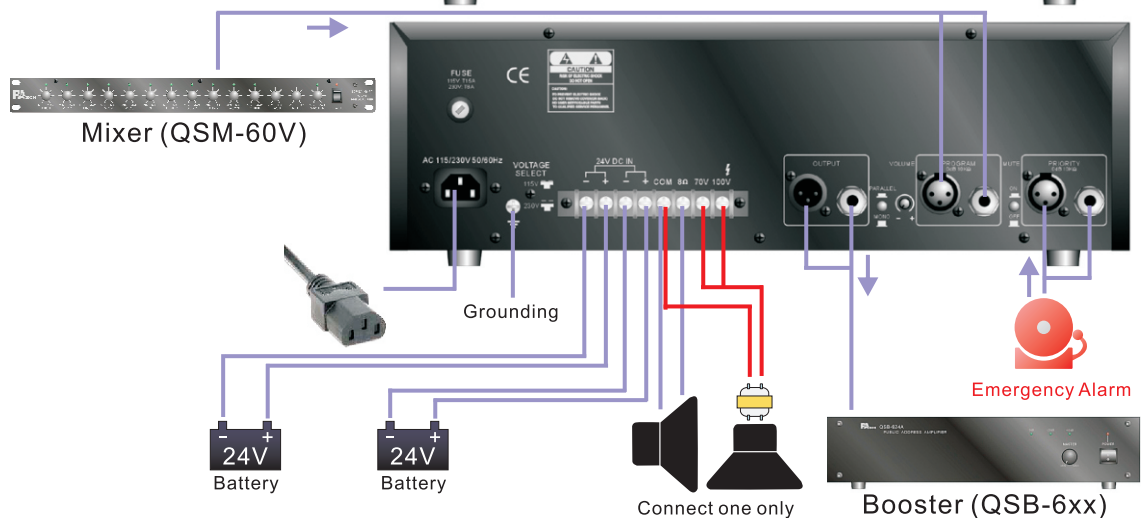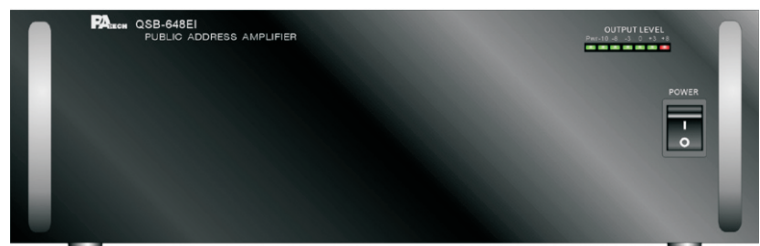

Model	QSB-612EI	QSB-624EI	QSB-636EI	QSB-648EI
Power Output (RMS)	120W	240W	360W	480W
Power Supply	AC 115/230V 50/60Hz, DC 24V			
Total Harmonic Distortion	≤ 1 % @ 1 KHz			
Sensitivity	XLR, Phone Jack, 50mV@ 10K Ω (Balanced)			
Output	100 V, 70 V, 8 Ω			
Signal to Noise Ratio	86 dB			
Priority	Mute "Program" Input			
AC Power Consumption	320W	640W	960W	1280W
DC Power Consumption	8A	15A	24A	30A
Dimension (H) x (W) x (D)	88 x 425 x 305 mm		132 x 425 x 355 mm	
Weight	8.5 KGS	10.5 KGS	13 KGS	17 KGS
Mounting	FREE STANDING or 19" RACK			

Features:

- ☐ Standard 19" rack model.
- ☐ 2 XLR / Phone Jack Input
- ☐ One XLR/Phone Jack Output
- ☐ Mute Selection Switch
- ☐ 2 power sources: DC 24V and AC 230/115V 50/60Hz
- ☐ Over temperature, over load, and speaker short protection
- ☐ Parallel/Mono selection Switch
- ☐ Speaker output : 8 Ω, 70V and 100V.