


4-CH Booster Amplifier QSB-6406M/QSB-6412M

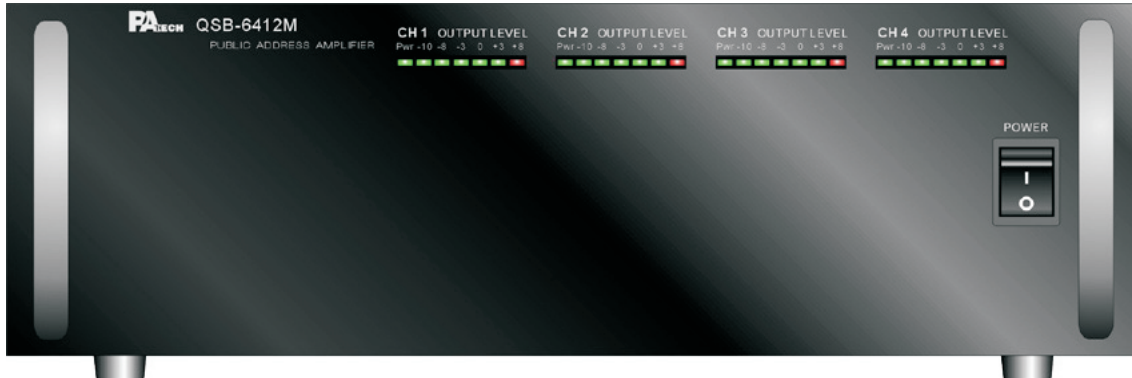

Features:

- ☐ 4 Channel Booster.
- ☐ Standard 19" rack model.
- ☐ One XLR / Phone Jack Input per channel
- ☐ One XLR / Phone Jack Output per channel
- ☐ Input gain level control.
- ☐ Parallel/mono selection switch
- ☐ 2 power sources: DC 24V and AC 230 or 115V 50/60Hz
- ☐ Over temperature, over load, and speaker short protection
- ☐ Speaker output : 8 Ω , 70V and 100V.

Model	QSB-6406M	QSB-6412M
Power Output (RMS)	60W x 4	120W x 4
Power Supply	AC 115V or 230V 50/60Hz, DC 24V	
Total Harmonic Distortion	<= 1 % @ 1 KHz	
Sensitivity	XLR, PHONE JACK (Balanced) 1V @ 10K Ω	
Output	100 V, 70 V, 8 Ω	
Signal To Noise Ratio	86 dB	
Indicator	POWER ON, LEVEL	
AC Power Consumption @Rated Power	160W	320 W
DC Power Consumption @Rated Power	6A	8 A
Dimension	132(H) x 425(W) x 420mm(D)	
Weight	21 KGS	25 KGS
Mounting	FREE STANDING OR 19" RACK	

4-CH Booster Amplifier QSB-6406M/QSB-6412M

