


## Stereo Power Amplifier - HTM-100


Option:  
USB+FM Tuner  
AM/FM Tuner  
USB



HTM-100

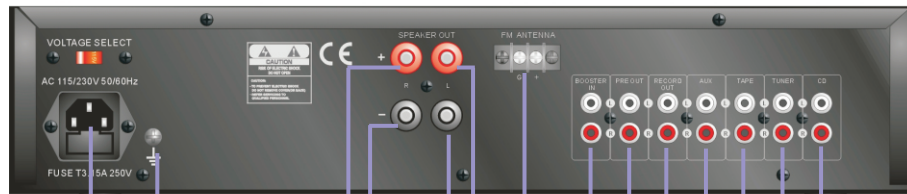

Grounding



Booster (QSB-6xxA)



Power Amp (PMA-1500)



CD (QSN-62D)



Tuner (QSN-62T)



Tuner (QSN-62T)



Mixer (QSM-60V)



Recorder (QSN-62R)

|                                  |                                                                                                                                     |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                     | <b>HTM-100</b>                                                                                                                      |
| <b>Power Output</b>              | 100W x 2 RMS                                                                                                                        |
| <b>Power Supply</b>              | AC 115 or 230V 50/60Hz                                                                                                              |
| <b>Total Harmonic Distortion</b> | ≤ 0.05 % @ 1 KHz                                                                                                                    |
| <b>Sensitivity</b>               | RCA JACK (UNBALANCED)<br>CD 200 mV @ 20KΩ<br>TUNER 200mV @ 20KΩ<br>TAPE 200mV @20KΩ<br>AUX 200mV @ 20KΩ<br>RECORD OUT, PRE OUT @ 1V |
| <b>Frequency Response</b>        | 50Hz ~ 20KHz ±3dB                                                                                                                   |
| <b>Output</b>                    | 8Ω BINDING POST                                                                                                                     |
| <b>Signal to Noise Ratio</b>     | >70 dB                                                                                                                              |
| <b>Damping Factor</b>            | >200                                                                                                                                |
| <b>Tone</b>                      | BASS 100Hz ± 10dB<br>TREBLE 10KHz ± 10dB                                                                                            |
| <b>Protection</b>                | SPEAKER SHORT<br>TEMPERATURE<br>OVERLOAD                                                                                            |
| <b>AC Power Consumption</b>      | 300W                                                                                                                                |
| <b>Dimension</b>                 | 88(H) x 425(W) x 305mm(D)                                                                                                           |
| <b>Weight</b>                    | 8 KGS                                                                                                                               |
| <b>Mounting</b>                  | FREE STANDING OR 19" RACK                                                                                                           |

### Features:

- ☐ Standard 19" rack model
- ☐ 2 channels (Stereo)
- ☐ 4 inputs : CD, Tuner, Tape, AUX
- ☐ Front input level control
- ☐ Front input selection switch CD/Tuner/Tape/AUX
- ☐ Over temperature, over load, and speaker short protection
- ☐ Booster input
- ☐ Master volume, Balance, Bass, and Treble control
- ☐ Pre-out + Record output
- ☐ 2U height