


USB Amplifier HTM-20

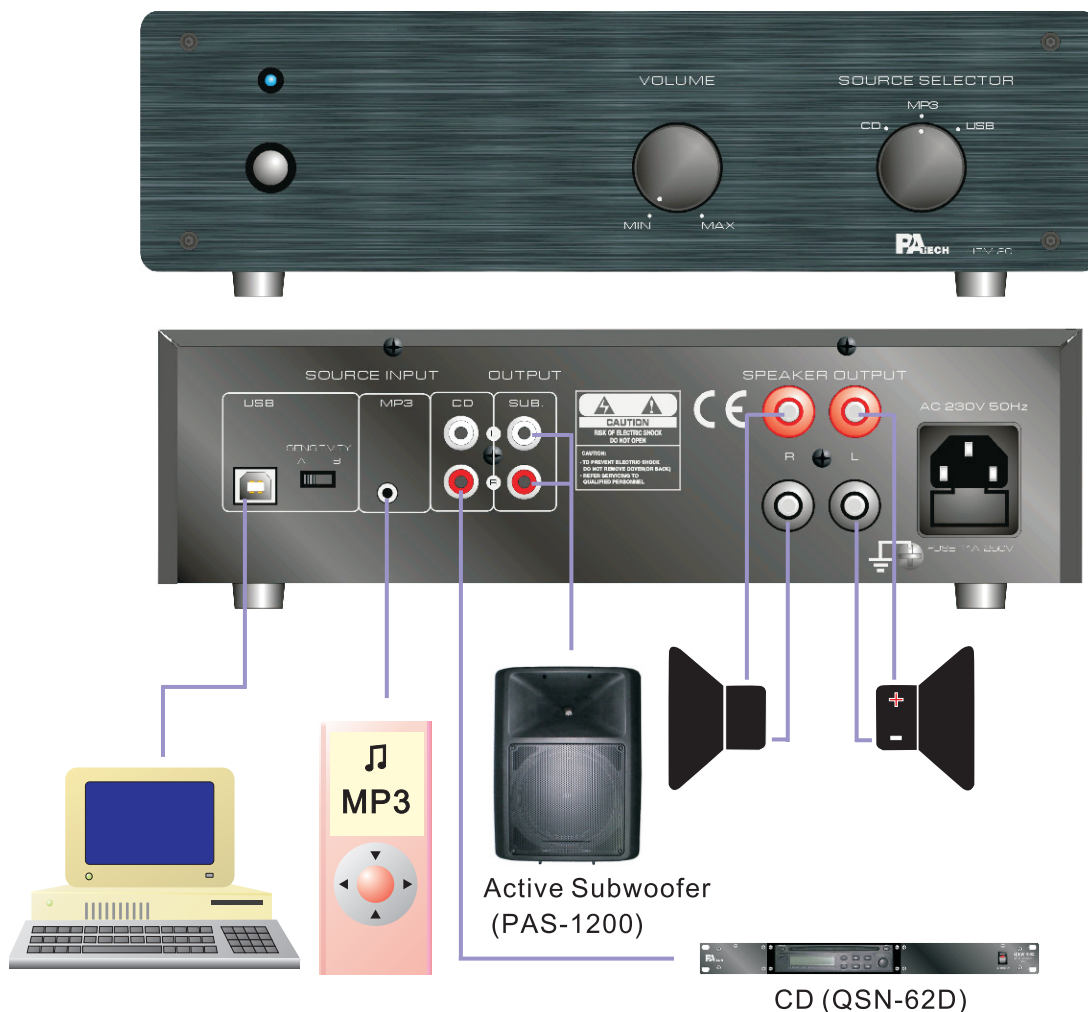

Model	HTM-20
Output Power	20W (Stereo)
Power Supply	AC 115V 60Hz or 230V 50Hz
Outputs	8 Ω Speaker, Subwoofer Pre-out
Frequency Response	20Hz ~ 20KHz $\pm$ 0.1 dB
Input Ports	USB, MP3(Dia. 3.5mm), CD(RCA Jack)
Input Sensitivity	CD, MP3: 200mV @ 10K Ω unbalanced
Output Sensitivity	Subwoofer Amplifier 200 mV
Total Harmonic Distortion	<0.1%@ 1KHz, rated power
Signal to Noise Ratio	> 80dB
AC Power Consumption	100W
Dimension	75 (H) x 275 (W) x 185 (D) mm
Weight	2.7 Kgs
Mounting	Desktop

Features:

- ☐ MP3, USB, & CD input.
- ☐ Easy to operate.
- ☐ Stereo
- ☐ Compact Size
- ☐ With Subwoofer output.
- ☐ Over temperature, over load, and speaker short protection