


Power Amplifier

PMA-200

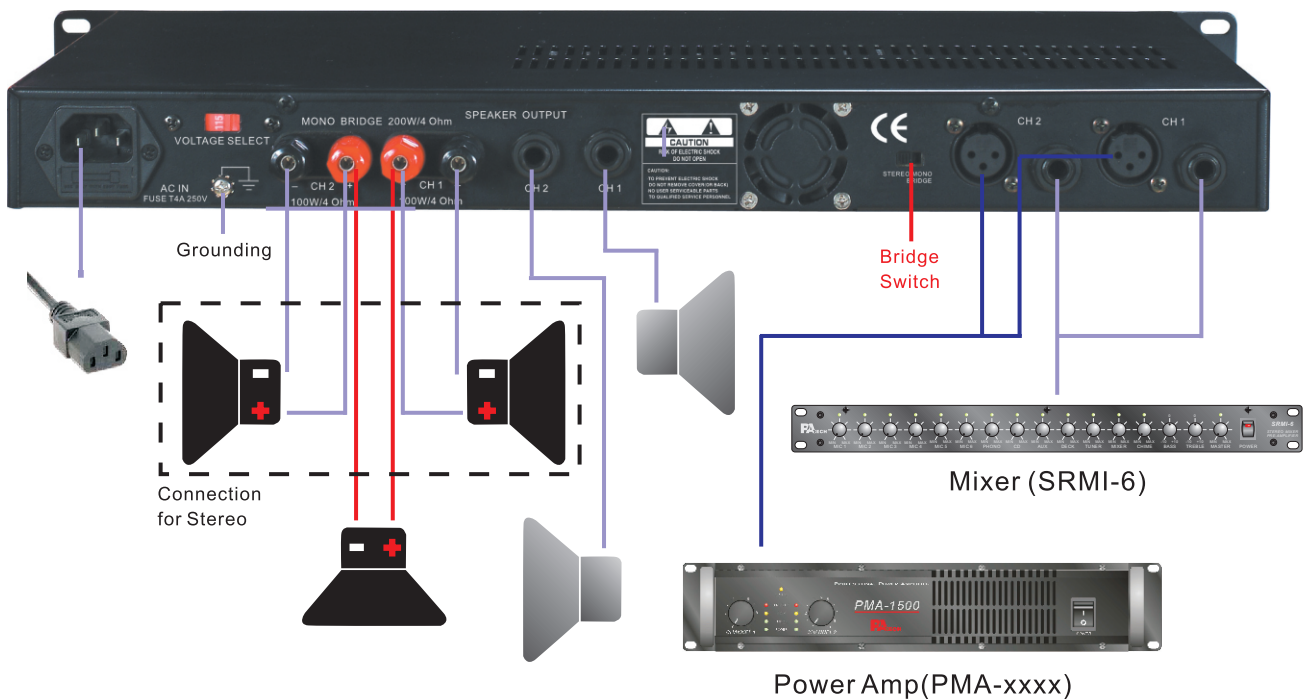

Model	PMA-200
Power Supply	AC 115V/230V, 50 / 60Hz $\pm$ 10% Switchable
Output power Rated:	130Wx2@4 Ω 1%THD 100Wx2@8 Ω 280W@4 Ω (Bridged) 200W@8 Ω (Bridged)
Total Harmonic Distortion	$\leq$ 0.05% at 20Hz ~ 20KHz
Sensitivity	1V (full power)
Signal to noise ratio	>100dB
Frequency response	20 Hz ~ 20 KHz
Inputs Impedance	10K Ω (Unbalanced) 1/4" Phone Jack 20K Ω (Balanced) XLR
Indicators	Signal, Protection, Peak, Bridge, Power
Speaker Output	Binding Type or Phone Jack
AC power consumption	500W @rated power
Dimensions	44(H) x 483(W) x 290mm(D)
Weight	6 KGS
Mounting options	19" rack

Features:

- ☐ Easy to Use.
- ☐ Standard 19" rack model.
- ☐ Can be bridged
- ☐ 2 channels
- ☐ Over temperature, over load, and speaker short protection.
- ☐ 1U height