
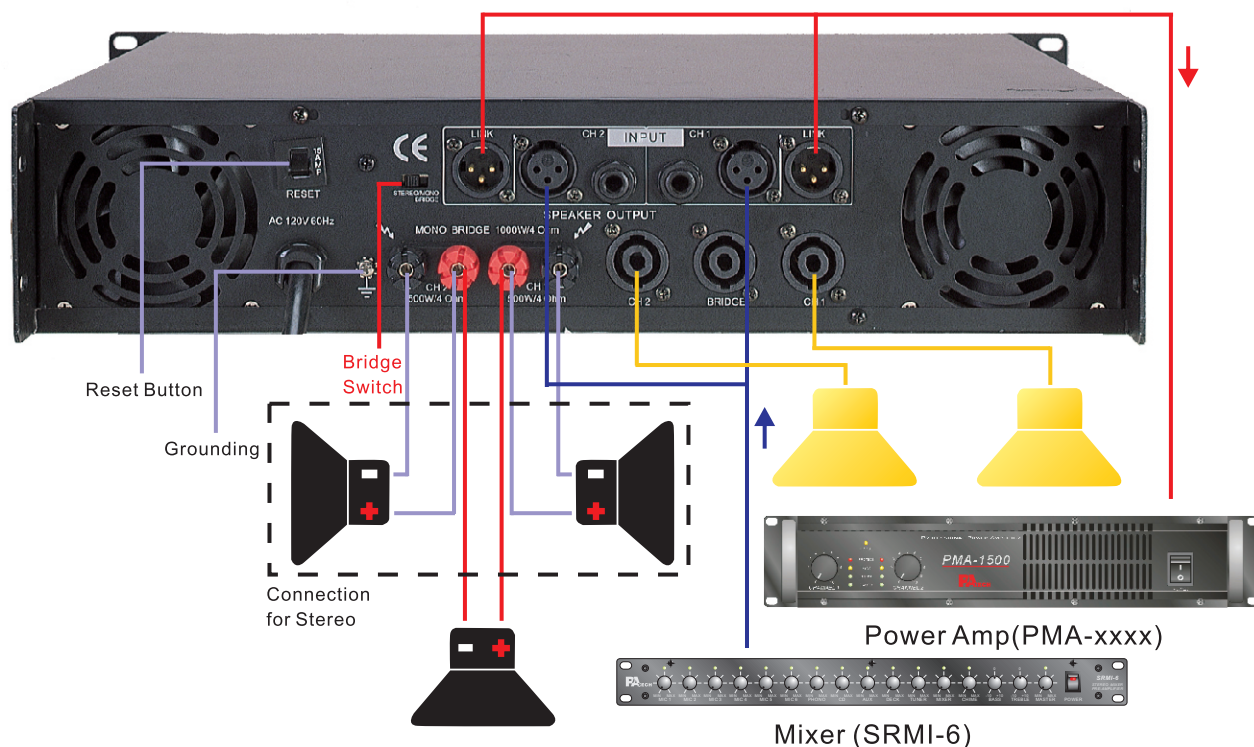


Power Amplifier PMA-500/PMA-1000

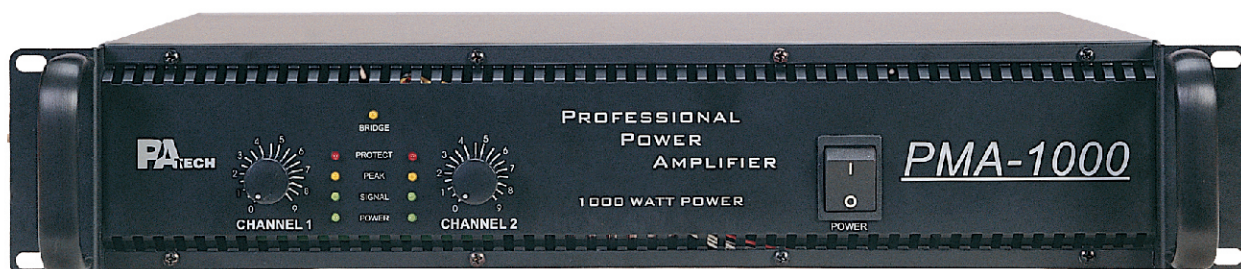

Model	PMA-500	PMA-1000
Power Supply	AC 115V or 230V, 50 / 60Hz $\pm$ 10% Switchable	
Output power Rated:	300Wx2@4 Ω 1%THD 200Wx2@8 Ω 600W@4 Ω (Bridged) 400W@8 Ω (Bridged)	600Wx2@4 Ω 1%THD 400Wx2@8 Ω 1200W@4 Ω (Bridged) 800W@8 Ω (Bridged)
Total Harmonic Distortion	$\leq$ 0.05% at 20Hz ~ 20KHz	
Sensitivity	1V (full power)	
Signal to noise ratio	>100dB	
Frequency response	20 Hz ~ 20 KHz	
Inputs Impedance	10K Ω (Unbalanced)1/4" Phone Jack 20K Ω (Balanced) XLR	
Indicators	Signal, Protection, Peak, Bridge, Power	
Speaker Output	Binding Type or Speakon Jack	
AC power consumption	1500W @rated power	3000W @rated power
Dimensions	88(H) x 483(W) x 410mm(D)	
Weight	14 KGS	18 KGS
Mounting options	19" rack mountable	

Features:

- ☐ Easy to Use.
- ☐ Standard 19" rack model.
- ☐ Can be bridged
- ☐ 2 channels
- ☐ Over temperature, over load, and speaker short protection.
- ☐ 2U height