


Power Amplifier

PMA-1500

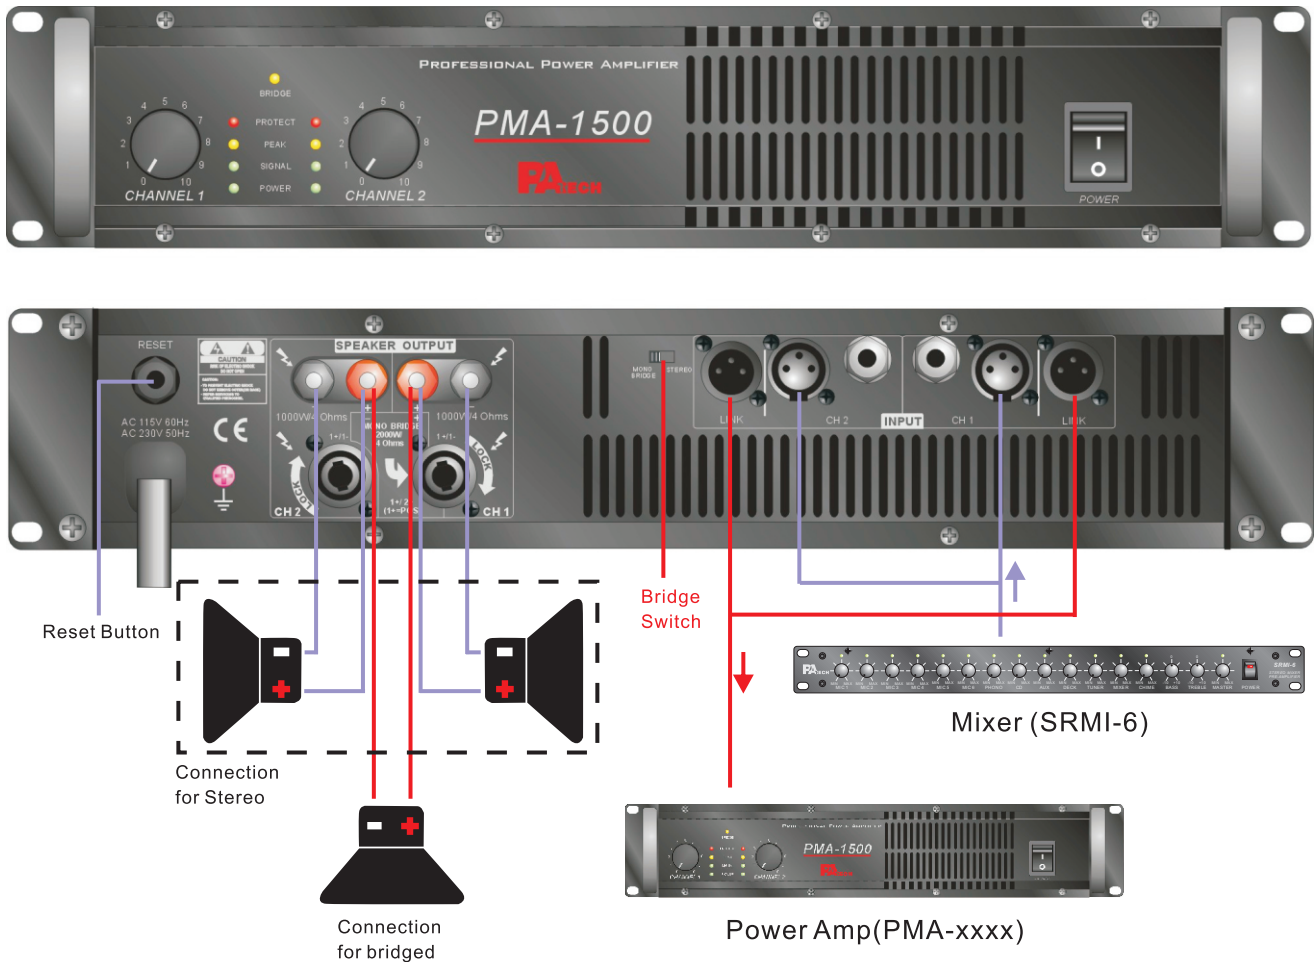

Model	PMA-1500
Power Supply	AC 115V / 230V, 50 / 60Hz $\pm$ 10% Switchable
Output power Rated:	1200W x 2@4 Ω 1%THD 600W x 2@8 Ω 3000W@4 Ω (Bridged) 1500W@8 Ω (Bridged)
Total Harmonic Distortion	$\leq$ 0.05% at 20Hz ~ 20KHz
Sensitivity	1V (full power)
Signal to noise ratio	>100dB
Frequency response	20 Hz ~ 20 KHz
Inputs Impedance	10K Ω (Unbalanced)1/4" Phone Jack 20K Ω (Balanced) XLR
Indicators	Signal, Protection, Peak, Bridge, Power
Speaker Output	Binding Type or Speakon Jack
AC power consumption	4000W @rated power
Dimensions	88(H) x 482(W) x 540 mm(D)
Weight	21 KGS
Mounting options	19" rack

Features:

- ☐ Easy to Use.
- ☐ Standard 19" rack model.
- ☐ Can be bridged
- ☐ 2 channels
- ☐ Over temperature, over load, and speaker short protection.
- ☐ 2U height