


4-CH Power Amplifier PMA-412

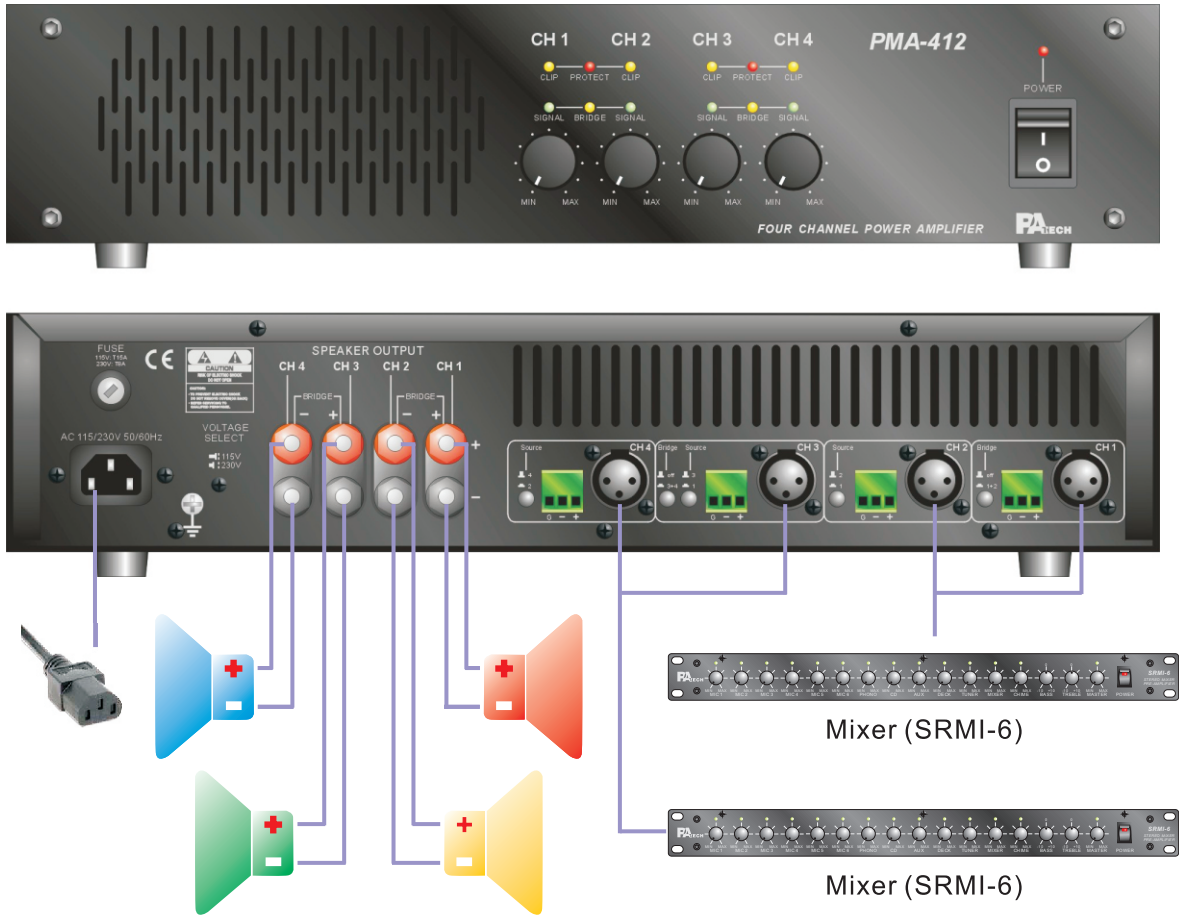

Model	PMA-412
Power Supply	AC 115V/230V, 50 / 60Hz $\pm$ 10% Switchable
Output power Rated:	200W x 4 @4 Ω 1%THD 125W x 4 @8 Ω 400W x 2 @4 Ω (Bridged) 250W x 2 @8 Ω (Bridged)
Total Harmonic Distortion	$\leq$ 0.05% at 20Hz ~ 20KHz
Sensitivity	1V (full power)
Signal to noise ratio	>100dB
Frequency response	20 Hz ~ 20 KHz
Inputs Impedance	10K Ω (Unbalanced) 1/4" Phone Jack 20K Ω (Balanced) XLR
Indicators	Signal, Protection, Peak, Bridge, Power
Speaker Output	Binding Type or Phone Jack
AC power consumption	2000W @rated power
Dimensions	88(H) x 425(W) x 400 mm(D)
Weight	16 KGS
Mounting options	19" rack

Features:

- ☐ Easy to Use.
- ☐ Standard 19" rack model
- ☐ Can be bridged
- ☐ 4 channels
- ☐ Over temperature, over load, and speaker short protection.
- ☐ 2U height