


Audio Distribution Mixer

SRDA-10

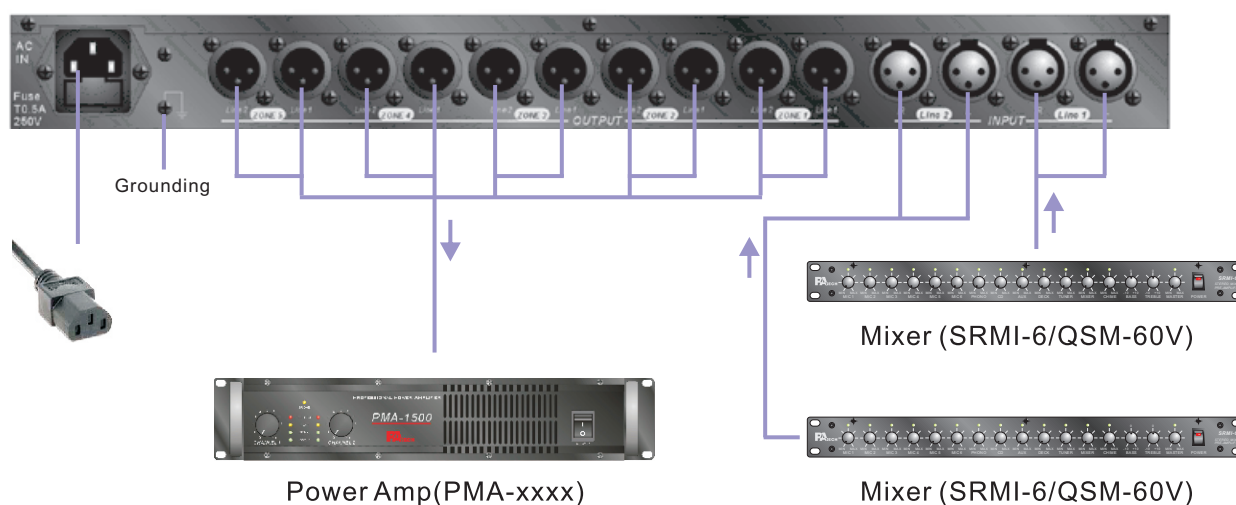

Model	SRDA-10
Type	Zone Distribution Mixer 2 Stereo Inputs+ 5 Stereo Outputs (10 Mono mode)
Power Supply	AC 115/230V 50/60Hz
Total Harmonic Distortion	<0.1%
Max. Input Level	+12 dBm (Balanced)
S/N Ratio	0~75dB
Output Level	+31dBm
Input Impedance	45K Ω (Balanced)
Output Impedance	150 Ω (Balanced)
Input Connector	XLR
Output Connector	XLR
Frequency Response	20 Hz ~ 20 KHz $\pm$ 0.1dB
Indicator	Source Input Stereo/Mono Select Output Level
Dimension	44(H) x 482(W) x 160mm(D)
Weight	3 KGS
Mounting options	19" rack

Features:

- ☐ Standard 19" rack model
- ☐ Easy to Use.
- ☐ 5-Zone (stereo) output or 10-channel (mono) output
- ☐ All XLR connector
- ☐ 4 Input LED indicators
- ☐ Front stereo/mono switch with indicator.
- ☐ Front individual level control with indicator.
- ☐ 1U height.