
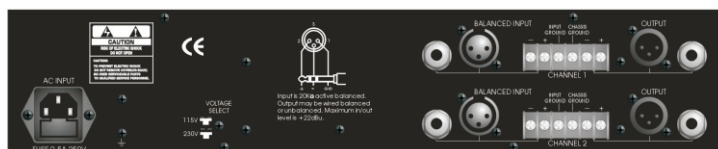



Sound Processor - Graphic Equalizer

SRQX-62/SRQX-152

Stereo 31 Band
SRQX-62

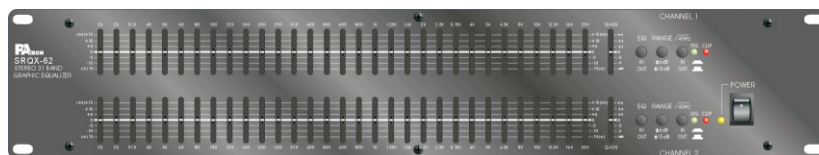

Stereo 15 Band
SRQX-152

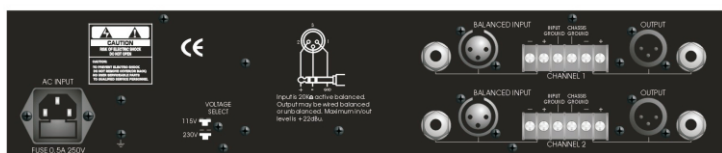

Model	SRQX-62	SRQX-152
Power Supply	AC 115/230V 60/50Hz	
Input Type	Active Balanced	
Input Impedance	10K Ω (Unbalanced) 20K Ω (Balanced)	
Output Type	Pseudo Balanced	
Output Impedance	150 Ω (Unbalanced) 300 Ω (Balanced)	
Max. Level	+22 dBu	
Connectors	1/4" Phone Jack, XLR, Screw Terminal	
Crosstalk	<80 dB @ 1K Hz	
Subsonic Filter	18 dB/Octave @ 40 Hz	
IM distortion	<0.01% @ +20 dBu (Smpte)	
Total Harmonic Distortion	<0.01% @ +20 dBu (20 Hz ~ 20K Hz)	
Output Hum & Noise	<-92 dBu	
Frequency Response	20 Hz ~ 20K Hz ± 0.25 dB	
AC Power Consumption	15W @ Rated Power	
Dimension	88 (H) x 483(W) x 160 (D) mm	
Weight	3.8 KGS	
Mounting	19" RACK	