


Public Address System

MIC Mixer Amplifier QSM-204

Option:
USB+FM Tuner
AM/FM Tuner
USB

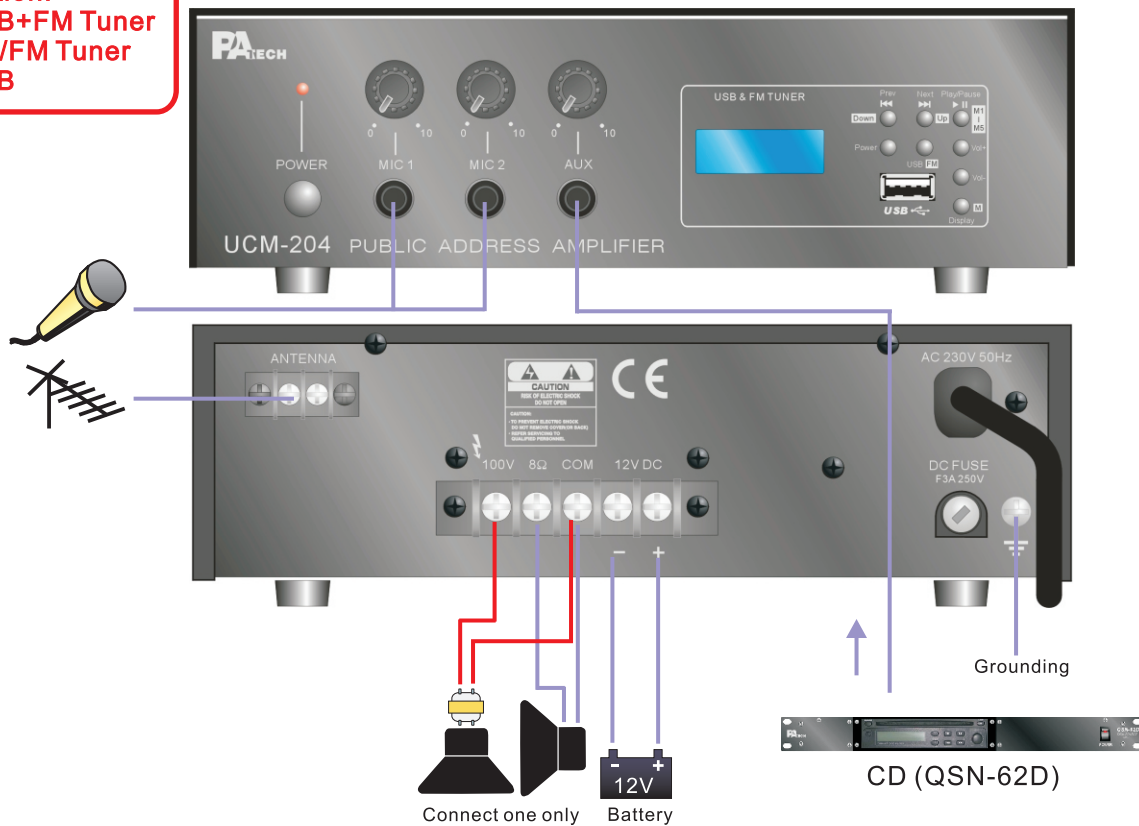

Model No:	QSM-204
Power Supply	AC 115 or 230V 50/60Hz, DC 12V
Power Output	40W MAX
Total Harmonic Distortion	≤1%@1 KHz
Sensitivity	MIC 1, MIC 2, AUX (Unbalanced) 1/4" Phone Jack MIC 1~2 , 4mV @600 Ω AUX , 100mV @10K Ω
Frequency Response	50 Hz ~ 15K Hz ± 3 dB
Output	100V, 8 Ω
Signal to Noise Ratio	80dB
AC Power Consumption	40 W @ RATED POWER
DC Power Consumption	3A @ RATED POWER
Dimension	70(H) x 240(W) x 187mm (D)
Weight	3 KGS
Mounting	Free Standing or Hang-bracket

Features:

- ☐ Compact size
- ☐ Easy to Use.
- ☐ 3 inputs : AUX x 1, MIC x 2
- ☐ Front input level control
- ☐ 2 power sources: DC 12V and AC 230V 50Hz or 115V 60Hz
- ☐ Over temperature, over load, and speaker short protection.
- ☐ Speaker output : 8 Ω, 100V output