


Mixer Amplifier

UCM-606AZ/UCM-612AZ/UCM-624AZ/
UCM-636AZ/UCM-648AZ

Option:
USB+FM Tuner
AM/FM Tuner
USB
Chime

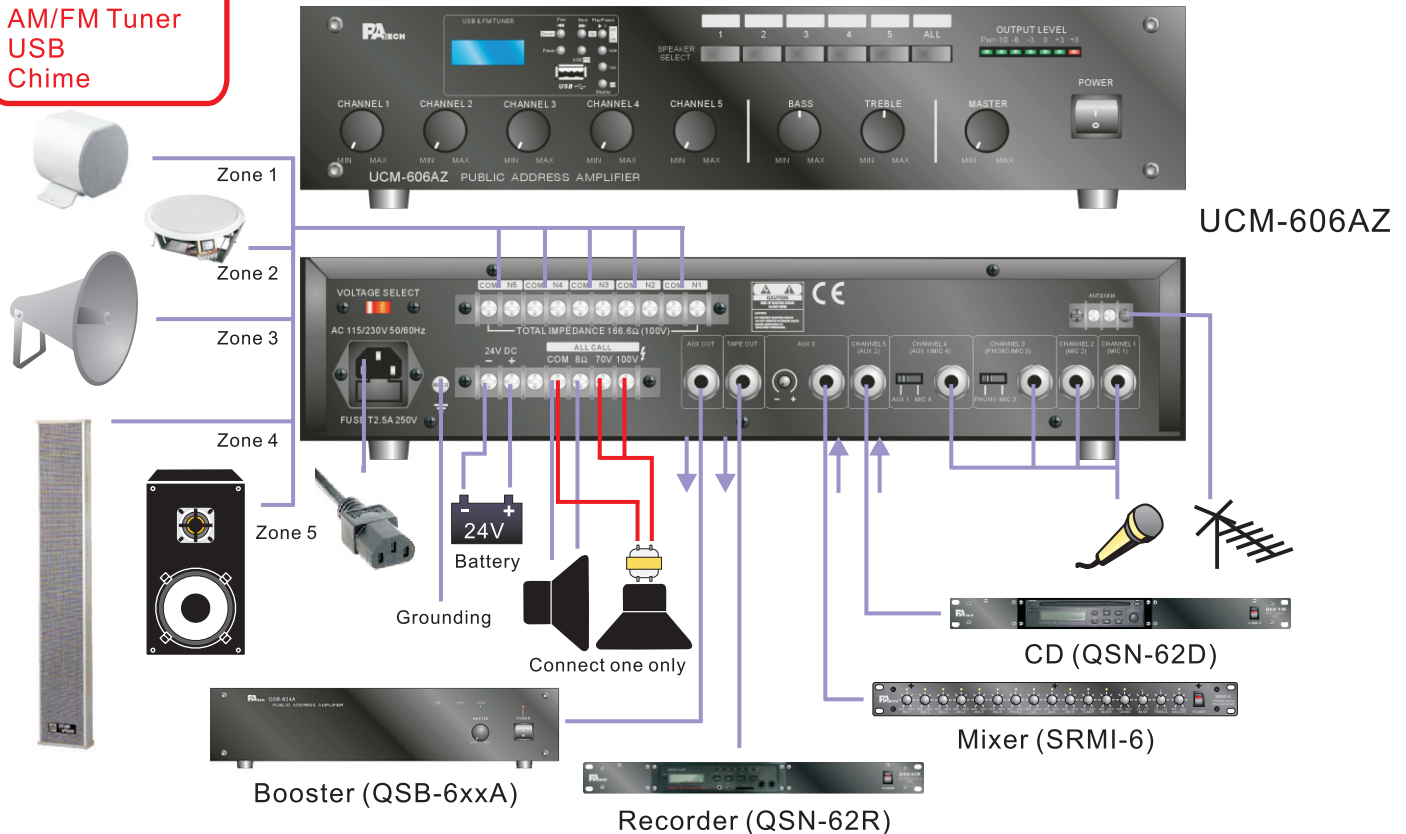

Model	UCM-606AZ	UCM-612AZ	UCM-624AZ	UCM-636AZ	UCM-648AZ
Power Output (RMS)	60W	120W	240W	360W	480W
Power Supply	AC 115/230V 50/60Hz, DC 24V				
Total Harmonic Distortion	≤1% @ 1 KHz				
Sensitivity	1/4" Phone Jack (Unbalance) Channel 1~3(MIC 1~3) 1mV @600 Ω Phono 2mV@50KΩ Channel 4(MIC 4) 1mV @600Ω Aux 1 100mV@220KΩ Channel 5(Aux 2), Aux 3 100mV@10kΩ Tape out, Aux out 1V				
Frequency Response	50 Hz ~ 15K Hz±3dB				
Mute Priority	MIC. 1; Mic2 is not affected.				
Output	100V, 70V, 8 Ω				
Signal to Noise Ratio	86 dB				
Tone	Bass 100 Hz ±10 dB; Treble 10KHz ±10 dB				
AC Power Consumption	160W	320 W	640W	960W	1280W
DC Power Consumption	4A	8A	16A	24A	30A
Dimension	88(H) x 425(W) x 305mm (D)			132(H) x 425(W) x 355mm (D)	
Weight	8 kgs	8.5 kgs	10.5 kgs	15 kgs	17 kgs
Mounting	FREE STANDING OR 19" RACK				