


Stereo Mixer Amplifier - UCM-810

Option:
USB+FM Tuner
AM/FM Tuner
USB

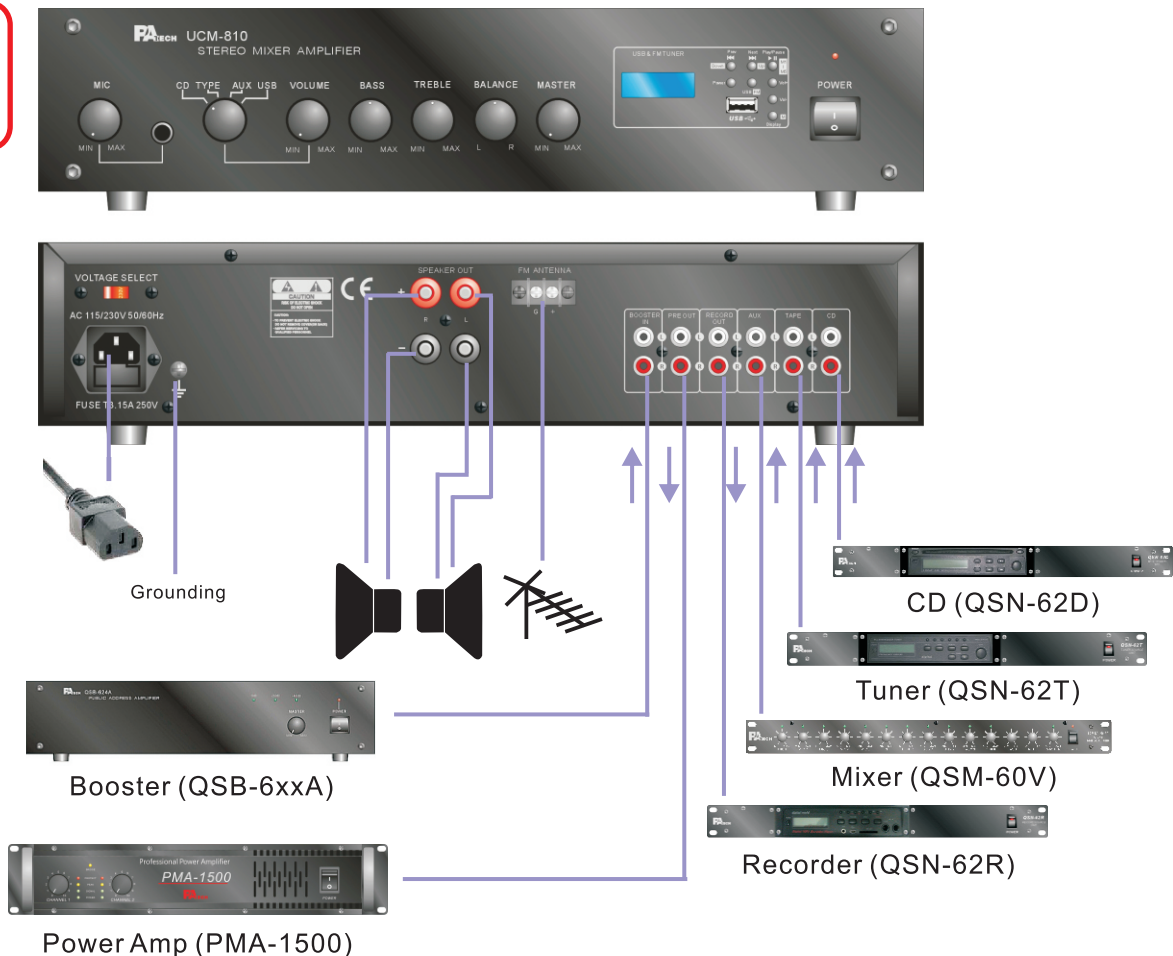

Model	UCM-810
Power Output	50W x 2 RMS
Power Supply	AC 115/230V 50/60Hz
Total Harmonic Distortion	≤ 0.05 % @ 1 KHz
Sensitivity	1/4" PHONE JACK (UNBALANCED) MIC 1.5mV @ 600Ω RCA JACK (UNBALANCED) CD 200 mV @ 20KΩ TAPE 200mV @20KΩ AUX 200mV @ 20KΩ RECORD OUT, PRE OUT @ 1V
Frequency Response	50Hz ~ 20KHz ±3dB
Output	8Ω BINDING POST
Signal to Noise Ratio	>70 dB
Damping Factor	>200
Tone	BASS 100Hz ± 10dB TREBLE 10KHz ± 10dB
Protection	SPEAKER SHORT TEMPERATURE OVERLOAD
AC Power Consumption	300W
Dimension	88(H) x 425(W) x 305mm(D)
Weight	8 KGS
Mounting	FREE STANDING OR 19" RACK

Features:

- ☐ Standard 19" rack model
- ☐ 2 channels (Stereo)
- ☐ 4 inputs : MIC, CD, Tape, AUX
- ☐ Front input level control
- ☐ Front input selection switch CD/Tape/AUX
- ☐ Over temperature, over load, and speaker short protection
- ☐ Booster input
- ☐ Master volume, Balance, Bass, and Treble control
- ☐ Pre-out + Record output
- ☐ 2U height